


.....
Wire-Wound - 0402, 0603, 0805, 1008, 1206, 1210 & 1812

RF Chip Inductors



WIRE-WOUND RF CHIP INDUCTORS

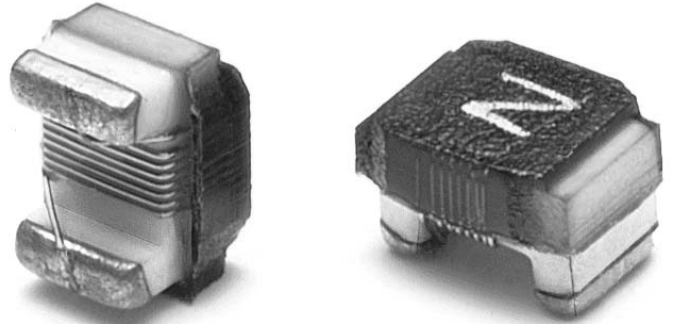

Pulse is one of the largest magnetic component design and manufacturing companies in the world. With over 19,000 employees worldwide and an extensive line of state-of-the-art magnetic solutions, Pulse has become a leading supplier of magnetic components to OEMs and Contract Manufacturers in data networking, connectivity, digital telecommunications including wireless communications, broadband/Internet, cable modems and most forms of power conversion. In addition, Pulse designs and manufactures end-user products such as DSL filters and splitters (Excelsus[®] products), as well as components used in consumer products such as personal computers, cable modems, TVs, DVDs, PDAs, digital cameras, and set-top boxes.

Engineering design centers and manufacturing facilities in North America, Europe and Asia supply product to a broad international customer base. Sales and service operations in the United States, Canada, United Kingdom, France, Italy, Singapore, Hong Kong and Taiwan, as well as authorized distributors and representatives worldwide, support Pulse customers around the globe. The company offers a complete line of magnetic components and modules for use in T1 telecommunications, Internet/broadband access, VoIP, DSL, Ethernet data networking up to one Gigabit, AC-DC, DC-DC and UPS power conversion and communication, and power conversion for military/aerospace applications. This extensive catalog of standard products is available through distributors worldwide.

With the acquisition of Eldor (Italy) in 2003, Pulse is now a leading worldwide supplier of magnetics for consumer applications, offering a wide range of product platforms including flyback transformers (FBTs), power switch-mode transformers (SMTs) and other inductive components for TV, DVD, set-top boxes and LCD TV monitors. Pulse has the industry's widest range of inductive solutions to designers and producers in the emerging digital consumer products markets.

Pulse has a wide range of capabilities to support customers. Real-time programs track current product development, vendor delivery and production status. They also schedule available delivery dates and support product delivery programs such as vendor-managed inventory, consignment and EDI ordering.

Pulse is proactive in developing industry standard products to ensure that its customers receive high-performance, high-quality and high-reliability products. Pulse is a member of and actively participates in IEEE, ANSI, T1/E1 and the DSL Forum. As an example, Pulse is a team member of the standards committee developing DSL products that allow broadband connectivity via household telephone lines.

Ongoing research and development at Pulse has resulted in multiple product patents along with several unique manufacturing processes. Likewise, Engineering design centers around the world can provide custom designs for applications not generally available in the current, Pulse catalog product lines.

Pulse works closely with the major semiconductor manufacturers (that provide the ICs controlling computer networks, DSL and telecommunications and power conversion electronics) to develop standard magnetic components that exactly match the magnetic requirements of the IC. These semiconductor companies recommend Pulse magnetics on their datasheets. Committed to delivering high-performance products, advanced technologies and world-class quality, Pulse supports the electronics industry and end-user with competitively priced products and services.

The 0402 to 1812 series of Miniature RF Inductors all contain wirewound technology and ceramic or ferrite cores, thus providing the ultimate performance demanded by today's RF applications. Inductors feature high Qs and SRFs and an industry standard size and footprint. Tighter inductance tolerances are available. CD, CM, CQ, FD and FT Series inductors are available in Tin or Gold terminations (Gold only for 0402CD series).

Sample kits are available from Pulse for all series. Please refer to page 2 for part numbers.

Use the Product Finder on the Pulse web site: <http://www.pulseeng.com/Products>

WIRE-WOUND RF CHIP INDUCTORS



The 0402 to 1812 series range of Miniature Chip Inductors contains the very latest in wire-wound technology and Ceramic or Ferrite Core, thus providing the ultimate in performance demanded by today's Wireless products. The Inductors provide high Q and SRFs in an industry standard size and footprint. Pulse chip inductors manufactured after February, 2005 are in compliance with RoHS requirements.

TABLE of CONTENTS

Part Number Legend & Design Kits Available	2
Selection Guide	3
Performance Specifications	
Environmental Testing	4
Mechanical Testing	4-5
Tape and Reel Specification	5
Miniature Wire-wound RF Chip Inductors	
0402CD Series	6-7
0603CD Series	8-9
0805CD Series	10-11
0805CM Series	12-13
0805FT Series	14-15
1008CD Series	16-17
1008CM Series	18-19
1008CQ Series	20-21
1008FD Series	22-23
1210FT Series	24-25
1206CD Series	26-27
1812FD Series	28-29
Application Notes	30-33

WIRE-WOUND RF CHIP INDUCTORS



Part Number Legend

PE — 0805 CD 121 K T T

PACKAGE STYLE (0402, 0603, 0805, 1008, 1210, 1206, or 1812)

CORE MATERIAL
C = Ceramic (Alumina) | **CQ** = High Q
CD = Standard range | **F** = Ferrite
CM = Alternative performance/inductance to CD

INDUCTANCE (nH)
Representative of the inductance value

TOLERANCE
F = ± 1% | **K** = ± 10%
G = ± 2% | **M** = ± 20%
J = ± 5%

TERMINATION (Lead Free Compatible)
T = Tin or Gold plating
G = Gold plating only
S = Tin plating only

PACKAGING (T = Tape & Reel: 7" or 13" reel)

Size	0402	0603	0805	1008	1210	1206	1812
Pcs/Reel	3000	2000	2000	1600	2000	3000	1500

Design Kits Available from Pulse



Product KIT Series	Kit Part Number	Tolerance
0402CD Series	PE-0402CDKIT-T	5%
0603CD Series	PE-0603CDKIT-T	2%
0805CD Series	PE-0805CDKIT-T	2%
0805FT Series	PE-0805FTKIT-T	5%
1008CD Series	PE-1008CDKIT-T	2%
1008FD Series	PE-1008FDKIT-T	5%
1210FT Series	PE-1210FTKIT-T	5%
1206CD Series	PE-1206CDKIT-T	5%
1812FD Series	PE-1812FDKIT-T	5%

NOTE: 0805CM, 1008CM and 1008CQ design kits are not available at this time.

WIRE-WOUND RF CHIP INDUCTORS Selection Guides



Electrical Specifications

Part Number	Size	Construction	Inductance (nH)	1 nH	10 nH	100 nH	1 μ H	10 μ H	100 μ H	1000 μ H		
0402CD	0402	Wirewound	1.0 to 120	[Bar chart showing range from 1 nH to 120 nH]								
0603CD	0603	Wirewound	1.6 to 390	[Bar chart showing range from 1.6 nH to 390 nH]								
0805CD	0805	Wirewound	2.8 to 1500	[Bar chart showing range from 2.8 nH to 1500 nH]								
0805CM	0805	Wirewound	3.3 to 820	[Bar chart showing range from 3.3 nH to 820 nH]								
0805FT	0805	Wirewound	1000 to 68000				[Bar chart showing range from 1000 nH to 68000 nH]					
1008CD	1008	Wirewound	4.0 to 8200	[Bar chart showing range from 4.0 nH to 8200 nH]								
1008CM	1008	Wirewound	4.7 to 4700	[Bar chart showing range from 4.7 nH to 4700 nH]								
1008CQ	1008	Wirewound	3.0 to 390	[Bar chart showing range from 3.0 nH to 390 nH]								
1008FD	1008	Wirewound	150 to 10000			[Bar chart showing range from 150 nH to 10000 nH]						
1210FT	1210	Wirewound	10 to 12000	[Bar chart showing range from 10 nH to 12000 nH]								
1206CD	1206	Wirewound	3.3 to 1200	[Bar chart showing range from 3.3 nH to 1200 nH]								
1812FD	1812	Wirewound	6 μ H to 1000 μ H				[Bar chart showing range from 6 μ H to 1000 μ H]					

CD Series: Standard 100% compatible with other market leaders.

CM Series: Offers improved electrical performance or alternative inductance values to Pulse CD series.

CQ Series: Offers high Q and high Idc series.

Competition Cross Reference

Type	Competition	Pulse Wire-wound Inductors									
		0402CD	0603CD	0805CD	0805FT	1008CQ	1008CD	1008FD	1210FT	1206CD	1812FD
Wire Wound	Coilcraft	0402CS	0603CS	0805CS/HS/HT		1008HQ	1008CS/HT/CT	1008LS		1206CS	1812LS
	Murata			LQW1608A			LQN21A				
	Taiyo Yuden			LB2012T			LEM_2520T				
	TDK				NL2016		NLH2520		NL3225		NL4532

WIRE-WOUND RF CHIP INDUCTORS

Performance Specifications




Environmental Testing

<p>Storage and Operating Temperature Range:</p> <p>-40 to +125°C</p>	<p>Inductors are subjected to the extremes for 48 hours.</p> <p>Then tested at 25°C</p>	<p>There shall be no deformation or change in appearance</p> <p>Inductance shall not change by more than $\pm 5\%$</p> <p>Q values shall not change by more than $\pm 10\%$</p>
<p>Thermal Shock:</p> <p>-40 to +85°C</p>	<p>Inductors are subjected to 30 cycles for 30 minutes at each extreme.</p> <p>Then tested at 25°C</p>	
<p>Moisture Resistance</p>	<p>Inductors are subjected to 10 cycles of 24 hours at 70°C with 90 to 95% Relative Humidity</p> <p>Then tested at 25°C</p>	
<p>Operating Life</p>	<p>Inductors are subjected to 1000 hours at 85°C with 85% Relative Humidity with the rated current applied</p>	<p>There shall be no Damaged, Open or Shorted Windings</p>

Mechanical Testing

<p>Temperature Range:</p>	<p>Inductors are subjected to the following: Use a solder pot at 260°C, with RMA Flux. Each termination is immersed in 63Sn/37Pb molten solder for 4 to 6 seconds.</p>	<p>There shall be no deformation or change in appearance</p> <p>Inductance shall not change by more than $\pm 5\%$</p> <p>Q values shall not change by more than $\pm 10\%$</p>
----------------------------------	--	---

Recommended Solder Heat Resistance Profile

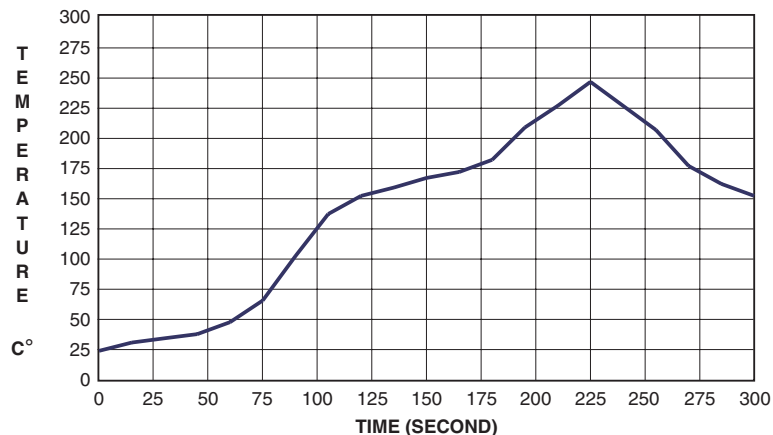

WIRE-WOUND RF CHIP INDUCTORS


Performance Specifications



Mechanical Testing

Vibration (Random)	Samplers are subjected to random vibration as per NAVMAT P9492	There shall be no deformation or change in appearance Inductance shall not change by more than $\pm 5\%$ Q values shall not change by more than $\pm 10\%$
Mechanical Shock	Inductors are subjected to one half sine wave pulse (8700 g's for 0.3 ms) in each directional axis for a total of 18 shocks	
Moisture Resistance	Reflow Inductors on to test pads using 63 Sn/37 Pb solder paste (IR Reflow profile = 200°C for 30 seconds or peak 235°C for 20 seconds)	The inductors shall withstand a minimum force of 1000 g's in any direction using a dynamometer force gauge.

Tape and Reel Specifications

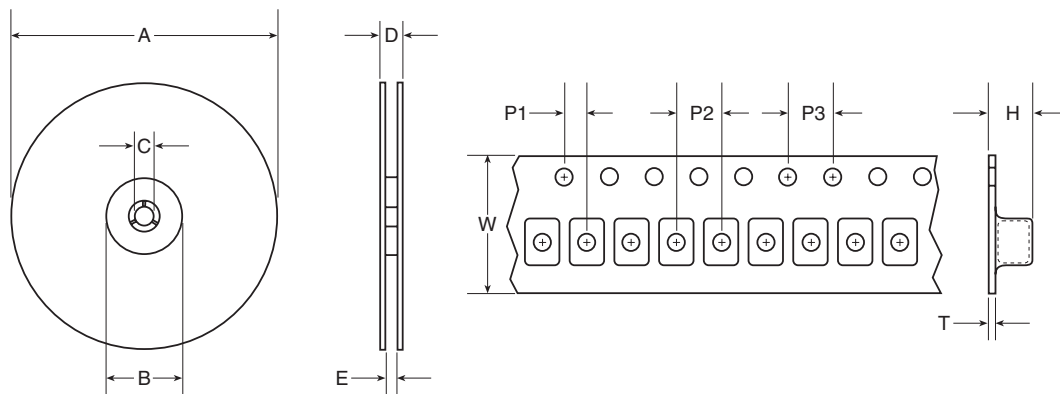






Packaging Specifications

Series	Parts per Reel	Reel Dimensions (mm)					Tape Dimensions (mm)					
		A	B	C	D	E	W	P1	P2	P3	H	T
0402CD	3000	178	50	13	14.4	8.4	8	2	4	4	1.1	0.3
0603CD	2000	178	50	13	14.4	8.4	8	2	4	4	1.7	0.3
0805CD	2000	178	50	13	14.4	8.4	8	2	4	4	2.1	0.3
0805CM	2000	178	50	13	14.4	8.4	8	2	4	4	2.1	0.3
0805FT	2000	178	50	13	14.4	8.4	8	2	4	4	2.1	0.3
1008CD	1600	178	50	13	14.4	8.4	8	2	4	4	2.6	0.3
1008CM	1600	178	50	13	14.4	8.4	8	2	4	4	2.6	0.3
1008CQ	1600	178	50	13	14.4	8.4	8	2	4	4	2.6	0.3
1008FD	1600	178	50	13	14.4	8.4	8	2	4	4	2.6	0.3
1210FT	2000	330	50	13	18.4	14.4	12	8	4	2	4.0	0.3
1206CD	3000	330	101	13	18.4	12.4	12	2	4	4	2.0	0.4
1812FD	1500	330	101	13	18.4	12.4	12	2	8	4	4.2	0.4

NOTE: P1, P2 and P3 are same for all chip inductor series. Keeping the same dimensions for guide hole and pocket pitch (P1), pocket pitch (P2), guide hole pitch (P3) and tape width (8mm) for all series, enables the packaging machine to maintain the same settings while changing models. The only difference between the series are the parts per reel which contribute to a different length of tapes/reel per model.

WIRE-WOUND RF CHIP INDUCTORS - 0402CD SERIES



-  Wirewound ceramic core construction
-  High Q values
-  High self resonant frequency
-  Industry standard 0402 (1005) surface mount land pattern
-  See page 3 for Competition Cross Reference

Electrical Specifications @ 25°C

Part Number	Inductance 1 (nH)	Standard Tolerance	Optional Tolerance	Q 2 (MIN)	SRF 3 (MHz MIN)	R _{dc} (Ω MAX)	I _{dc} (mA MAX)
PE-0402CD1N0KTG	1.0 @ 250 MHz	±10% (K)	±5% (J)	13 @ 250 MHz	6000	0.045	1360
PE-0402CD1N2KTG	1.2 @ 250 MHz	±10% (K)	±5% (J)	13 @ 250 MHz	6000	0.060	1300
PE-0402CD1N8KTG	1.8 @ 250 MHz	±10% (K)	±5% (J)	16 @ 250 MHz	6000	0.070	1040
PE-0402CD1N9KTG	1.9 @ 250 MHz	±10% (K)	±5% (J)	16 @ 250 MHz	6000	0.070	1040
PE-0402CD2N0KTG	2.0 @ 250 MHz	±10% (K)	±5% (J)	16 @ 250 MHz	6000	0.070	1040
PE-0402CD2N2KTG	2.2 @ 250 MHz	±10% (K)	±5% (J)	18 @ 250 MHz	6000	0.070	960
PE-0402CD2N4KTG	2.4 @ 250 MHz	±10% (K)	±5% (J)	18 @ 250 MHz	6000	0.068	900
PE-0402CD2N7KTG	2.7 @ 250 MHz	±10% (K)	±5% (J)	18 @ 250 MHz	6000	0.120	860
PE-0402CD3N3KTG	3.3 @ 250 MHz	±10% (K)	±5% (J)	20 @ 250 MHz	6000	0.066	840
PE-0402CD3N6KTG	3.6 @ 250 MHz	±10% (K)	±5% (J)	20 @ 250 MHz	6000	0.066	840
PE-0402CD3N9KTG	3.9 @ 250 MHz	±10% (K)	±5% (J)	20 @ 250 MHz	5800	0.066	840
PE-0402CD4N3KTG	4.3 @ 250 MHz	±10% (K)	±5% (J)	20 @ 250 MHz	5800	0.091	640
PE-0402CD4N7KTG	4.7 @ 250 MHz	±10% (K)	±5% (J)	20 @ 250 MHz	4775	0.130	640
PE-0402CD5N1KTG	5.1 @ 250 MHz	±10% (K)	±5% (J)	23 @ 250 MHz	5800	0.083	800
PE-0402CD5N6KTG	5.6 @ 250 MHz	±10% (K)	±5% (J)	23 @ 250 MHz	5800	0.083	760
PE-0402CD6N2KTG	6.2 @ 250 MHz	±10% (K)	±5% (J)	23 @ 250 MHz	5800	0.083	760
PE-0402CD6N8KTG	6.8 @ 250 MHz	±10% (K)	±5% (J)	20 @ 250 MHz	5800	0.083	680
PE-0402CD7N5KTG	7.5 @ 250 MHz	±10% (K)	±5% (J)	25 @ 250 MHz	5800	0.104	680
PE-0402CD8N2KTG	8.2 @ 250 MHz	±10% (K)	±5% (J)	25 @ 250 MHz	4400	0.104	680
PE-0402CD8N7KTG	8.7 @ 250 MHz	±10% (K)	±5% (J)	21 @ 250 MHz	4100	0.200	680
PE-0402CD9N0KTG	9.0 @ 250 MHz	±10% (K)	±5% (J)	25 @ 250 MHz	4160	0.104	680
PE-0402CD9N5KTG	9.5 @ 250 MHz	±10% (K)	±5% (J)	21 @ 250 MHz	4000	0.200	600
PE-0402CD100KTG	10 @ 250 MHz	±10% (K)	±5% (J)	21 @ 250 MHz	3900	0.195	480
PE-0402CD110KTG	11 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	3680	0.120	640
PE-0402CD120KTG	12 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	3600	0.120	640
PE-0402CD130KTG	13 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	3450	0.210	600
PE-0402CD150KTG	15 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	3280	0.172	560
PE-0402CD160KTG	16 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	3100	0.220	560
PE-0402CD180KTG	18 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	3100	0.230	520
PE-0402CD190KTG	19 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	3040	0.202	480
PE-0402CD200KTG	20 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	3000	0.250	480
PE-0402CD220KTG	22 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	2800	0.300	400
PE-0402CD230KTG	23 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	2720	0.214	400
PE-0402CD240KTG	24 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	2700	0.300	400
PE-0402CD270KTG	27 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	2480	0.298	400

(Continued on next page)

WIRE-WOUND RF CHIP INDUCTORS - 0402CD SERIES




Electrical Specifications @ 25°C (continued)

Part Number	Inductance 1 (nH)	Standard Tolerance	Optional Tolerance	Q 2 (MIN)	SRF 3 (MHz MIN)	R _{DC} (Ω MAX)	I _{bc} (mA MAX)
PE-0402CD300KTG	30 @ 250 MHz	±10% (K)	±5% (J)	25 @ 250 MHz	2350	0.300	350
PE-0402CD330KTG	33 @ 250 MHz	±10% (K)	±5% (J)	24 @ 250 MHz	2350	0.350	350
PE-0402CD360KTG	36 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	2320	0.403	320
PE-0402CD390KTG	39 @ 250 MHz	±10% (K)	±5% (J)	25 @ 250 MHz	2100	0.550	320
PE-0402CD400KTG	40 @ 250 MHz	±10% (K)	±5% (J)	26 @ 250 MHz	2240	0.438	320
PE-0402CD430KTG	43 @ 250 MHz	±10% (K)	±5% (J)	25 @ 250 MHz	2030	0.810	240
PE-0402CD470KTG	47 @ 250 MHz	±10% (K)	±5% (J)	20 @ 250 MHz	2100	0.830	100
PE-0402CD510KTG	51 @ 250 MHz	±10% (K)	±5% (J)	25 @ 250 MHz	1750	0.820	100
PE-0402CD560KTG	56 @ 250 MHz	±10% (K)	±5% (J)	22 @ 250 MHz	1750	0.970	100
PE-0402CD680KTG	68 @ 250 MHz	±10% (K)	±5% (J)	18 @ 250 MHz	1840	0.970	100
PE-0402CD820KTG	82 @ 250 MHz	±10% (K)	±5% (J)	16 @ 250 MHz	1680	1.250	100
PE-0402CD101KTG	100 @ 250 MHz	±10% (K)	±5% (J)	16 @ 250 MHz	1620	2.600	100
PE-0402CD121KTG	120 @ 250 MHz	±10% (K)	±5% (J)	14 @ 250 MHz	1520	2.700	90


Notes:

- Inductance measured using a HP4286A RF Impedance Analyzer. (Please note that inductance information is not stamped on part, because of the extremely small size).
- Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
- SRF measured using a HP8753C Network Analyzer.
- R_{DC} measured using a Valhalla Scientific model 4100 ATC Digital Ohmmeter.
- Based on a 15°C maximum temperature rise.
- Sample Kit Part Number: **PE-0402CDKIT-T**
- Component Weight: 0.002 grams typical.


Typical Q vs Frequency

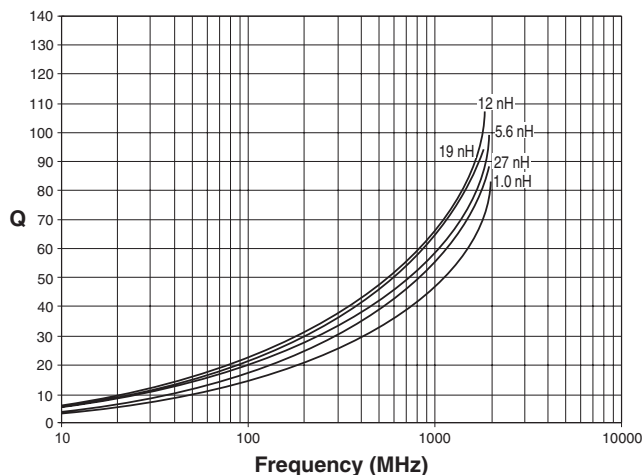


Typical Inductance vs Frequency

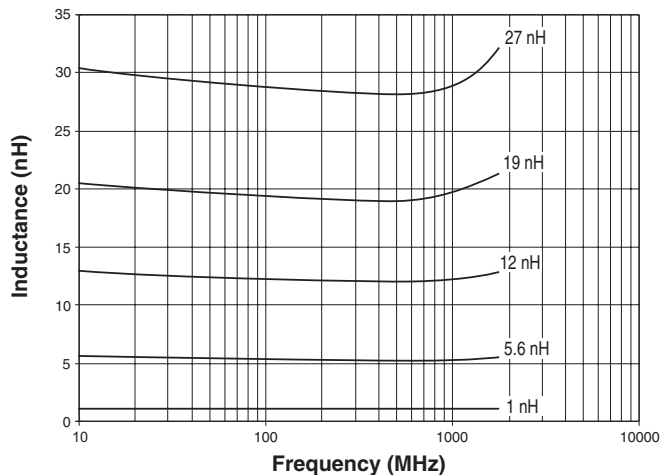



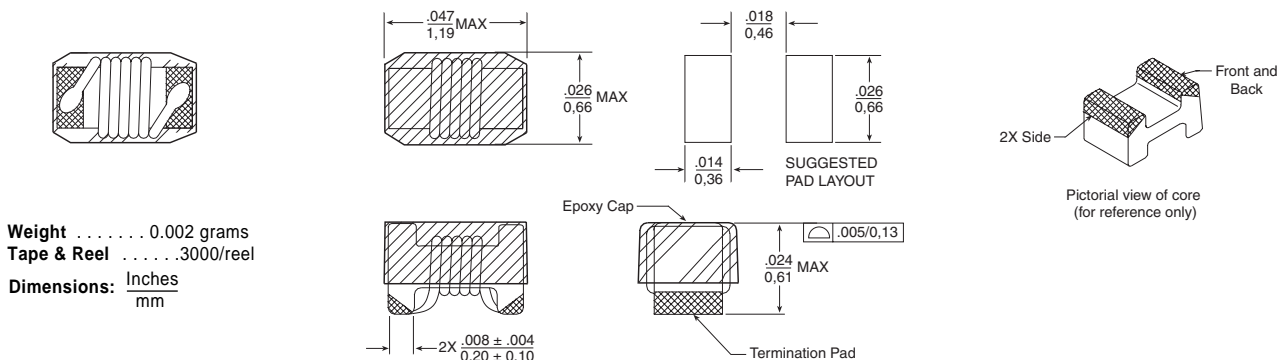


Mechanical

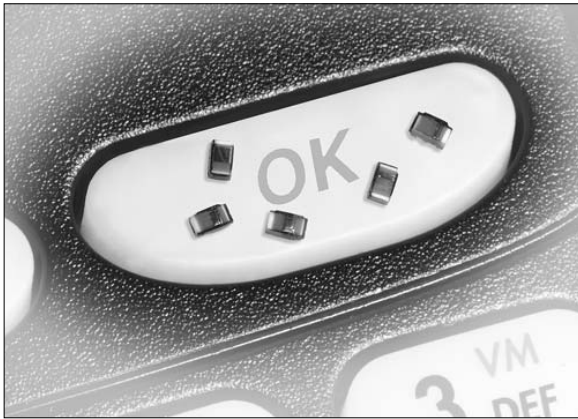

WIRE-WOUND RF CHIP INDUCTORS - 0603CD SERIES



-  Wirewound ceramic core construction
-  High Q values
-  High self resonant frequency
-  Industry standard 0603 (1608) surface mount land pattern
-  See page 3 for Competition Cross Reference

Electrical Specifications @ 25°C

Part Number	Inductance ¹ (nH)	Standard Tolerance	Optional Tolerance	Q ² (MIN)	SRF ³ (MHz MIN)	Rdc ⁴ (Ω MAX)	I _{cc} ⁵ (mA MAX)
PE-0603CD1N6KTT	1.6 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	24 @ 250 MHz	>6000	0.030	700
PE-0603CD010KTT	1.7 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	16 @ 250 MHz	>6000	0.050	700
PE-0603CD1N8KTT	1.8 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	16 @ 250 MHz	>6000	0.045	700
PE-0603CD2N2KTT	2.2 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	18 @ 250 MHz	>6000	0.110	700
PE-0603CD3N3KTT	3.3 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 250 MHz	>6000	0.045	700
PE-0603CD3N6KTT	3.6 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	20 @ 250 MHz	>6000	0.070	700
PE-0603CD030KTT	3.9 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	20 @ 250 MHz	>6000	0.080	700
PE-0603CD4N3KTT	4.3 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	20 @ 250 MHz	>6000	0.102	700
PE-0603CD040KTT	4.55 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	20 @ 250 MHz	5800	0.106	700
PE-0603CD4N7KTT	4.7 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	20 @ 250 MHz	5800	0.116	700
PE-0603CD5N1KTT	5.1 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	20 @ 250 MHz	5700	0.108	700
PE-0603CD5N6KTT	5.6 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	25 @ 250 MHz	5500	0.108	700
PE-0603CD6N2KTT	6.2 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	25 @ 250 MHz	5800	0.110	700
PE-0603CD060KTT	6.68 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	25 @ 250 MHz	5800	0.110	700
PE-0603CD6N8KTT	6.8 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	27 @ 250 MHz	5800	0.110	700
PE-0603CD7N5KTT	7.5 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	28 @ 250 MHz	4800	0.115	700
PE-0603CD080KTT	8.2 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	30 @ 250 MHz	4600	0.120	700
PE-0603CD8N7KTT	8.7 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	28 @ 250 MHz	4600	0.109	700
PE-0603CD9N5KTT	9.5 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	28 @ 250 MHz	5400	0.135	700
PE-0603CD100KTT	10 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	30 @ 250 MHz	4800	0.130	700
PE-0603CD110KTT	11 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	30 @ 250 MHz	4000	0.086	700
PE-0603CD120KTT	12 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	30 @ 250 MHz	4000	0.130	700
PE-0603CD130KTT	13 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	38 @ 250 MHz	3600	0.106	700
PE-0603CD150KTT	15 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	30 @ 250 MHz	4000	0.170	700
PE-0603CD160KTT	16 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 250 MHz	3300	0.170	700
PE-0603CD180KTT	18 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 250 MHz	3100	0.170	700
PE-0603CD220KTT	22 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 250 MHz	3000	0.190	700
PE-0603CD230KTT	23 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	38 @ 250 MHz	2850	0.190	700
PE-0603CD240KTT	24 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 250 MHz	2650	0.200	600
PE-0603CD270KTT	27 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 250 MHz	2800	0.220	600
PE-0603CD300KTT	30 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	37 @ 250 MHz	2250	0.144	600
PE-0603CD330KTT	33 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 250 MHz	2300	0.220	600
PE-0603CD360KTT	36 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	37 @ 250 MHz	2080	0.250	600
PE-0603CD390KTT	39 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 250 MHz	2200	0.250	600
PE-0603CD430KTT	43 @ 250 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 250 MHz	2000	0.280	600
PE-0603CD470KTT	47 @ 200 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 200 MHz	2000	0.280	600
PE-0603CD510KTT	51 @ 200 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 200 MHz	1900	0.270	600
PE-0603CD560KTT	56 @ 200 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 200 MHz	1900	0.310	600
PE-0603CD680KTT	68 @ 200 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	35 @ 200 MHz	1700	0.340	600
PE-0603CD720KTT	72 @ 150 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	34 @ 150 MHz	1700	0.490	400

(Continued on next page)

WIRE-WOUND RF CHIP INDUCTORS - 0603CD SERIES




Electrical Specifications @ 25°C (continued)

Part Number	Inductance ¹ (nH)	Standard Tolerance	Optional Tolerance	Q ² (MIN)	SRF ³ (MHz MIN)	Rdc ⁴ (Ω MAX)	Idc ⁵ (mA MAX)
PE-0603CD820KTT	82 @ 150 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	34 @ 150 MHz	1700	0.540	400
PE-0603CD101KTT	98.50 @ 150 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	34 @ 150 MHz	1400	0.580	400
PE-0603CDR10KTT	100 @ 150 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	34 @ 150 MHz	1400	0.580	400
PE-0603CD111KTT	110 @ 150 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	33 @ 150 MHz	1300	0.610	300
PE-0603CDR12KTT	120 @ 150 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	32 @ 150 MHz	1300	0.650	300
PE-0603CD121KTT	122 @ 150 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	33 @ 150 MHz	1300	0.650	300
PE-0603CD151KTT	150 @ 150 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	28 @ 150 MHz	990	0.920	280
PE-0603CD181KTT	180 @ 100 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	25 @ 100 MHz	990	1.250	240
PE-0603CD201KTT	200 @ 100 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	25 @ 100 MHz	900	1.980	240
PE-0603CD211KTT	210 @ 100 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	27 @ 100 MHz	895	2.060	220
PE-0603CD221KTT	220 @ 100 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	25 @ 100 MHz	900	1.900	200
PE-0603CD251KTT	250 @ 100 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	25 @ 100 MHz	822	3.550	180
PE-0603CD271KTT	270 @ 100 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	24 @ 100 MHz	860	2.300	170
PE-0603CD331KTT	330 @ 100 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	22 @ 100 MHz	500	2.300	150
PE-0603CD391KTT	390 @ 100 MHz	+/-10% (K)	+/-5% (J), +/-2% (G)	20 @ 100 MHz	350	2.900	130


Notes:

- Inductance measured using a HP4286A RF Impedance Analyzer.
- Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
- SRF measured using a HP8753C Network Analyzer.
- RDC measured using a Valhalla Scientific model 4100 ATC Digital Ohmmeter.
- Based on a 15°C maximum temperature rise.
- Sample Kit Part Number: **PE-0603CDKIT-T**



Typical Q vs Frequency

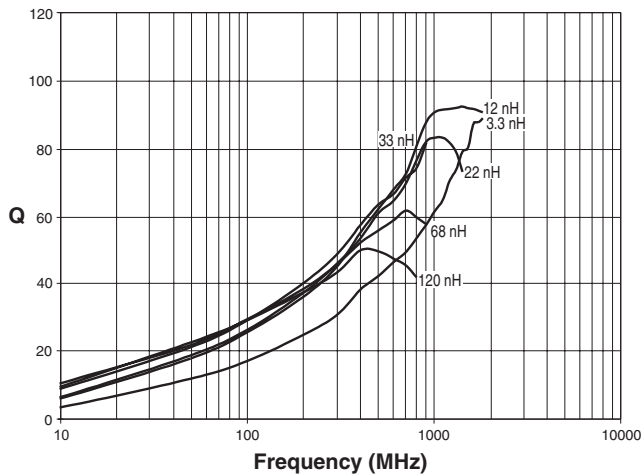

Typical Inductance vs Frequency

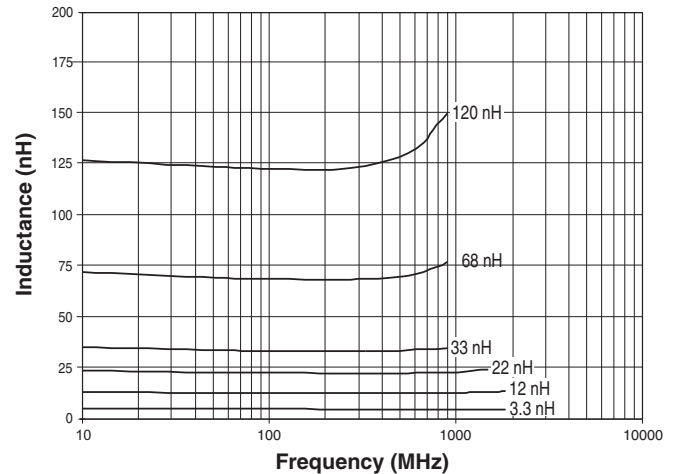

Mechanical

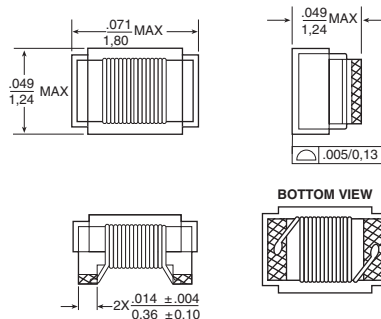


SUGGESTED PAD LAYOUT

Dimensions: Inches
mm

Unless otherwise specified
all tolerances are ± .010
0.25

WIRE-WOUND RF CHIP INDUCTORS - 0805CD SERIES

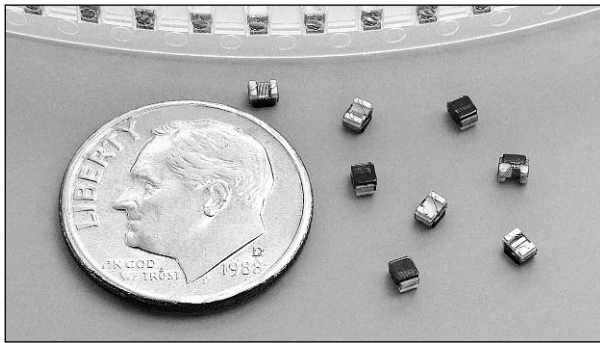

- ⊕ Wirewound ceramic core construction
- ⊕ High Q values and self-resonant frequency
- ⊕ Industry standard 0805 (2012) surface mount land pattern
- ⊕ See page 3 for Competition Cross Reference

Electrical Specifications @ 25°C

Part Number	Inductance ¹ (nH)	Standard Tolerance	Optional Tolerance	Q ² (MIN)	SRF ³ (MHz MIN)	R _{DC} ⁴ (Ω MAX)	I _{DC} ⁵ (mA MAX)
PE-0805CD2N8KTT	2.8 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	80 @ 1500 MHz	>6000	0.06	600
PE-0805CD030KTT	3.0 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	65 @ 1500 MHz	>6000	0.06	600
PE-0805CD030KTT	3.32 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	40 @ 1500 MHz	6000	0.08	600
PE-0805CD050KTT	5.6 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 1500 MHz	5500	0.10	600
PE-0805CD060KTT	6.5 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 1000 MHz	5000	0.11	600
PE-0805CD7N5KTT	7.5 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 1000 MHz	4500	0.14	600
PE-0805CD080KTT	7.9 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 1000 MHz	4700	0.12	600
PE-0805CD100KTT	10.2 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 500 MHz	4100	0.14	600
PE-0805CD120KTT	11.9 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 500 MHz	4000	0.15	600
PE-0805CD150KTT	14.9 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 500 MHz	3400	0.17	600
PE-0805CD180KTT	17.95 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 500 MHz	3300	0.20	600
PE-0805CD220KTT	21.7 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	55 @ 500 MHz	2600	0.22	500
PE-0805CD240KTT	24 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 500 MHz	2000	0.22	500
PE-0805CD270KTT	26.5 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	55 @ 500 MHz	2500	0.25	500
PE-0805CD330KTT	32.75 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	60 @ 500 MHz	2050	0.27	500
PE-0805CD360KTT	36 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	55 @ 500 MHz	1700	0.27	500
PE-0805CD390KTT	38.5 @ 250 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	60 @ 500 MHz	2000	0.29	500
PE-0805CD430KTT	43 @ 200 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	60 @ 500 MHz	1650	0.34	500
PE-0805CD470KTT	46.6 @ 200 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	60 @ 500 MHz	1650	0.31	500
PE-0805CD560KTT	55.5 @ 200 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	60 @ 500 MHz	1550	0.34	500
PE-0805CD680KTT	67.8 @ 200 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	60 @ 500 MHz	1450	0.38	500
PE-0805CD820KTT	82.7 @ 150 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	60 @ 500 MHz	1300	0.42	400
PE-0805CD910KTT	91 @ 150 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	65 @ 500 MHz	1200	0.44	400
PE-0805CD101KTT	98.7 @ 150 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	60 @ 500 MHz	1200	0.46	400
PE-0805CD111KTT	110 @ 150 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 250 MHz	1000	0.48	400
PE-0805CD121KTT	119.7 @ 150 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 250 MHz	1100	0.51	400
PE-0805CD151KTT	149.4 @ 100 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 250 MHz	920	0.56	400
PE-0805CD181KTT	179.6 @ 100 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	50 @ 250 MHz	870	0.64	400
PE-0805CD221KTT	217 @ 100 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	45 @ 250 MHz	850	0.70	400
PE-0805CD241KTT	240 @ 100 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	44 @ 250 MHz	690	1.00	350
PE-0805CD271KTT	269 @ 100 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	45 @ 250 MHz	650	1.00	350
PE-0805CD331KTT	331 @ 100 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	45 @ 250 MHz	600	1.40	310
PE-0805CD391KTT	386 @ 100 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	35 @ 250 MHz	560	1.50	290
PE-0805CD471KTT	477 @ 50 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	33 @ 100 MHz	375	1.76	250
PE-0805CD561KTT	545 @ 25 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	23 @ 50 MHz	340	1.90	230
PE-0805CD681KTT	674 @ 25 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	23 @ 50 MHz	188	2.20	190
PE-0805CD821KTT	783 @ 25 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	23 @ 50 MHz	215	2.35	180
PE-0805CD102KTT	1000 @ 25 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	20 @ 50 MHz	200	3.60	150
PE-0805CD122KTT	1200 @ 25 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	20 @ 50 MHz	200	4.10	120
PE-0805CD152KTT	1500 @ 25 MHz	±10% (K)	±5% (J), ±2% (G), ±1% (F)	20 @ 50 MHz	200	5.00	100

For other inductance values in 0805 size, please refer to 0805CM (page 12-13) and 0805FT (page 14-15).


NOTES:

1. Inductance measured with HP4286A RF Impedance Analyzer.
2. Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
3. SRF measured using a HP8753C Network Analyzer.
4. R_{DC} measured using a Valhalla Scientific model 4100 ATC Digital Ohmmeter.
5. Based on a 15°C maximum temperature rise.
6. Sample Kit Part Number: **PE-0805CDKIT-T**


WIRE-WOUND RF CHIP INDUCTORS - 0805CD SERIES




Typical Q vs Frequency

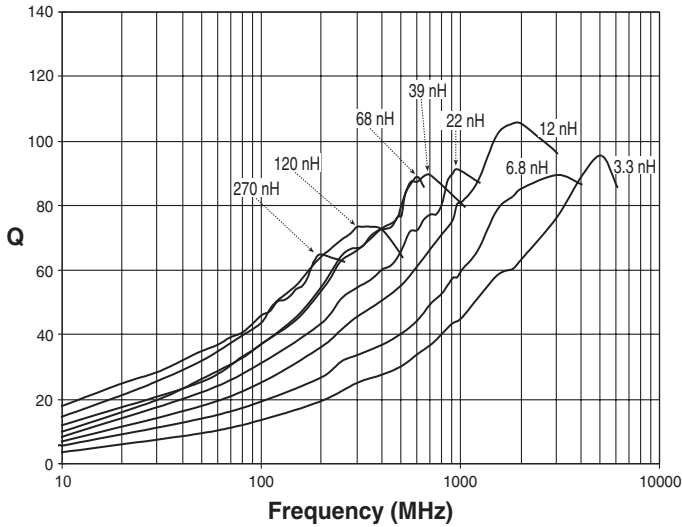

Typical Inductance vs Frequency

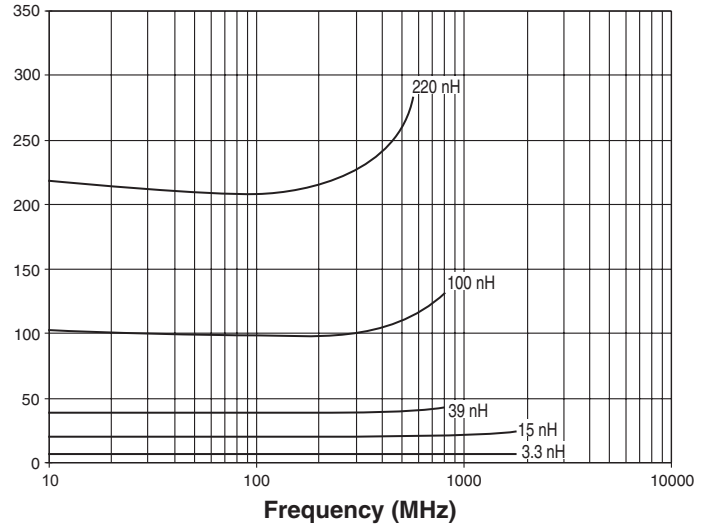

Mechanical

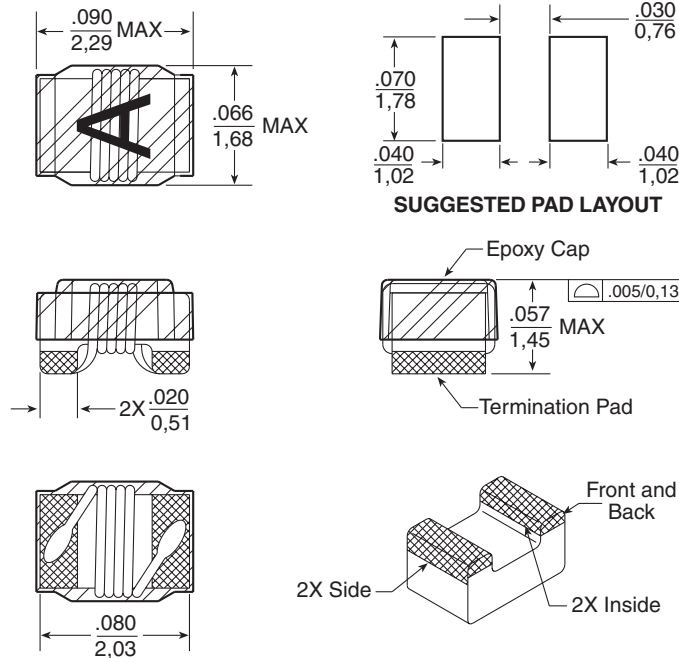

Weight 0.012 grams
Tape & Reel 2000/reel
Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Unless otherwise specified
 all tolerances are $\pm \frac{.010}{0,25}$

WIRE-WOUND RF CHIP INDUCTORS - 0805CM SERIES



- Ⓜ Wirewound ceramic core construction
- Ⓜ High Q values and self-resonant frequency
- Ⓜ Industry standard 0805 (2012) surface mount land pattern
- Ⓜ See page 3 for Competition Cross Reference

Electrical Specifications @ 25°C

Part Number	Inductance ¹ (nH)	Standard Tolerance	Optional Tolerance	Q ² (MIN)	SRF ³ (MHz MIN)	R _{DC} ⁴ (Ω MAX)	I _{DC} ⁵ (mA MAX)
PE-0805CM030KTT	3.3 @ 250 MHz	± 10% (K)	±5% (J), ±2% (G)	37 @ 1500 MHz	5000	0.08	600
PE-0805CM060KTT	6.8 @ 250 MHz	± 10% (K)	±5% (J), ±2% (G)	46 @ 1000 MHz	5000	0.15	600
PE-0805CM080KTT	8.2 @ 250 MHz	± 10% (K)	±5% (J), ±2% (G)	47 @ 1000 MHz	3900	0.13	600
PE-0805CM100KTT	10 @ 250 MHz	± 10% (K)	±5% (J), ±2% (G)	60 @ 500 MHz	3900	0.10	600
PE-0805CM120KTT	12 @ 250 MHz	± 10% (K)	±5% (J), ±2% (G)	50 @ 500 MHz	2900	0.13	600
PE-0805CM150KTT	15 @ 250 MHz	± 10% (K)	±5% (J), ±2% (G)	50 @ 500 MHz	2700	0.15	600
PE-0805CM180KTT	18 @ 250 MHz	± 10% (K)	±5% (J), ±2% (G)	50 @ 500 MHz	2600	0.13	600
PE-0805CM220KTT	22 @ 250 MHz	± 10% (K)	±5% (J), ±2% (G)	55 @ 500 MHz	2200	0.13	500
PE-0805CM270KTT	27 @ 250 MHz	± 10% (K)	±5% (J), ±2% (G)	55 @ 500 MHz	2000	0.23	500
PE-0805CM330KTT	33 @ 250 MHz	± 10% (K)	±5% (J), ±2% (G)	58 @ 500 MHz	1800	0.18	500
PE-0805CM390KTT	39 @ 250 MHz	± 10% (K)	±5% (J), ±2% (G)	60 @ 500 MHz	1600	0.23	500
PE-0805CM470KTT	47 @ 200 MHz	± 10% (K)	±5% (J), ±2% (G)	60 @ 500 MHz	1650	0.25	500
PE-0805CM560KTT	56 @ 200 MHz	± 10% (K)	±5% (J), ±2% (G)	60 @ 500 MHz	1300	0.16	500
PE-0805CM680KTT	68 @ 200 MHz	± 10% (K)	±5% (J), ±2% (G)	60 @ 500 MHz	1350	0.18	500
PE-0805CM820KTT	82 @ 150 MHz	± 10% (K)	±5% (J), ±2% (G)	60 @ 500 MHz	1300	0.36	400
PE-0805CM101KTT	100 @ 150 MHz	± 10% (K)	±5% (J), ±2% (G)	55 @ 500 MHz	1100	0.36	400
PE-0805CM121KTT	120 @ 150 MHz	± 10% (K)	±5% (J), ±2% (G)	45 @ 250 MHz	1100	0.56	350
PE-0805CM151KTT	150 @ 100 MHz	± 10% (K)	±5% (J), ±2% (G)	50 @ 250 MHz	900	0.56	350
PE-0805CM181KTT	180 @ 100 MHz	± 10% (K)	±5% (J), ±2% (G)	50 @ 250 MHz	875	0.69	300
PE-0805CM221KTT	220 @ 100 MHz	± 10% (K)	±5% (J), ±2% (G)	45 @ 250 MHz	800	0.85	300
PE-0805CM271KTT	270 @ 100 MHz	± 10% (K)	±5% (J), ±2% (G)	40 @ 100 MHz	800	0.90	300
PE-0805CM331KTT	330 @ 100 MHz	± 10% (K)	±5% (J), ±2% (G)	40 @ 100 MHz	775	1.28	300
PE-0805CM391KTT	390 @ 100 MHz	± 10% (K)	±5% (J), ±2% (G)	40 @ 100 MHz	725	1.70	300
PE-0805CM471KTT	470 @ 100 MHz	± 10% (K)	±5% (J), ±2% (G)	38 @ 100 MHz	600	3.25	240
PE-0805CM561KTT	560 @ 100 MHz	± 10% (K)	±5% (J), ±2% (G)	40 @ 100 MHz	600	3.10	240
PE-0805CM681KTT	680 @ 50 MHz	± 10% (K)	±5% (J), ±2% (G)	32 @ 50 MHz	550	3.50	240
PE-0805CM821KTT	820 @ 50 MHz	± 10% (K)	±5% (J), ±2% (G)	23 @ 50 MHz	215	2.35	200


NOTES:

1. Inductance measured using a HP4286A RF Impedance Analyzer.
2. Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
3. SRF measured using a HP8753C Network Analyzer.
4. R_{DC} measured using a Valhalla Scientific model 4100 ATC Digital Ohmmeter.
5. Based on a 15°C maximum temperature rise.


WIRE-WOUND RF CHIP INDUCTORS - 0805CM SERIES




Typical Q vs Frequency

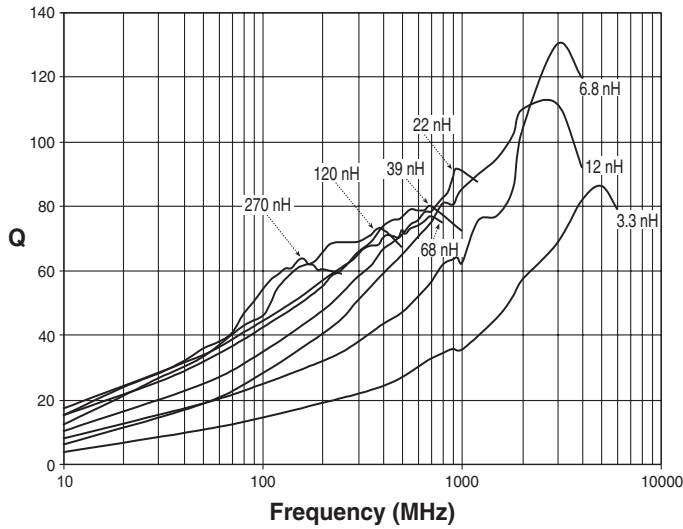

Typical Inductance vs Frequency

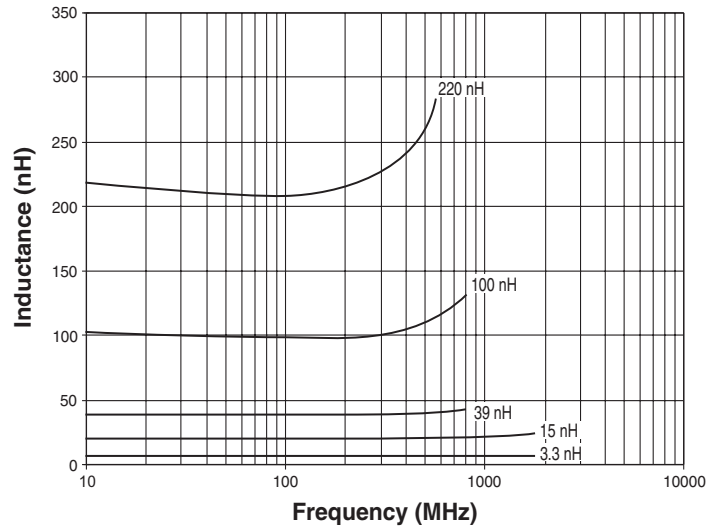


Mechanical

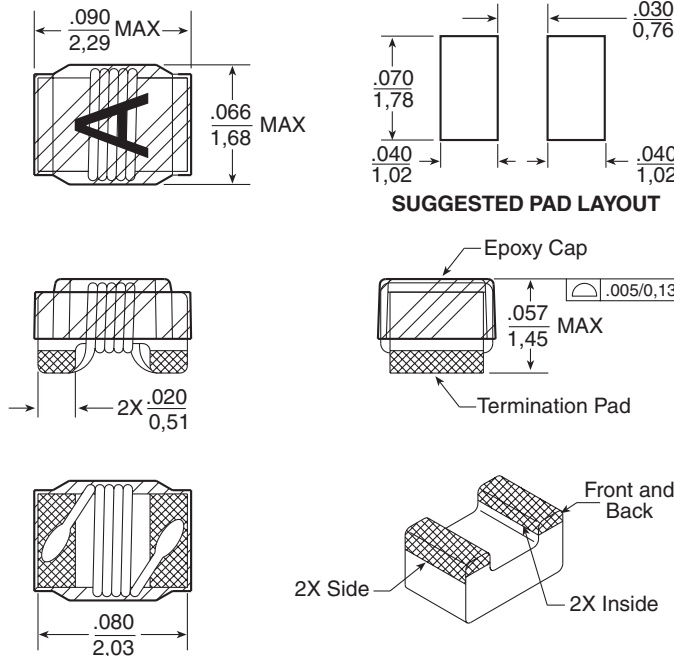

Weight 0.012 grams
Tape & Reel 2000/reel
Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified
all tolerances are $\pm \frac{.010}{0,25}$

WIRE-WOUND RF CHIP INDUCTORS - 0805FT SERIES

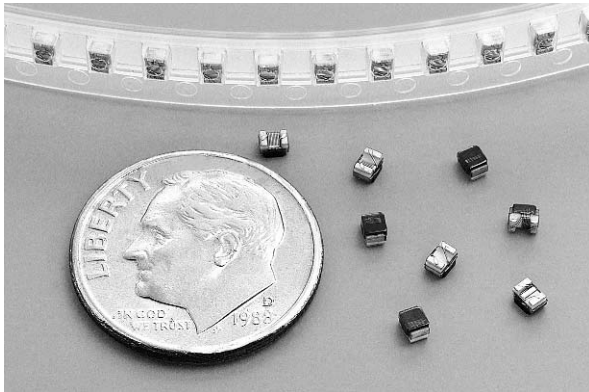

- ④ Wirewound ferrite core construction
- ④ High Q values and self-resonant frequency
- ④ Industry standard 0805 (2012) surface mount land pattern
- ④ See page 3 for Competition Cross Reference

Electrical Specifications @ 25°C

Part Number	Inductance ¹ (μ H)	Tolerance	Q ² (MIN)	SRF ³ (MHz MIN)	R _{DC} ⁴ (Ω MAX)	I _{DC} ⁵ (mA MAX)
PE-0805FT102KTT	1.0 @ 7.96 MHz	+/-10%, +/- 5%	15 @ 7.96 MHz	63	1.20	245
PE-0805FT152KTT	1.5 @ 7.96 MHz	+/-10%, +/- 5%	15 @ 7.96 MHz	60	1.45	225
PE-0805FT222KTT	2.2 @ 7.96 MHz	+/-10%, +/- 5%	15 @ 7.96 MHz	58	1.80	200
PE-0805FT332KTT	3.3 @ 7.96 MHz	+/-10%, +/- 5%	15 @ 7.96 MHz	50	2.30	175
PE-0805FT472KTT	4.7 @ 7.96 MHz	+/-10%, +/- 5%	15 @ 7.96 MHz	43	2.80	140
PE-0805FT682KTT	6.8 @ 7.96 MHz	+/-10%, +/- 5%	15 @ 7.96 MHz	36	3.40	115
PE-0805FT103KTT	10 @ 2.52 MHz	+/-10%, +/- 5%	10 @ 2.52 MHz	30	4.70	98
PE-0805FT153KTT	15 @ 2.52 MHz	+/-10%, +/- 5%	10 @ 2.52 MHz	23	6.50	80
PE-0805FT223KTT	22 @ 2.52 MHz	+/-10%, +/- 5%	10 @ 2.52 MHz	20	8.00	68
PE-0805FT333KTT	33 @ 2.52 MHz	+/-10%, +/- 5%	10 @ 2.52 MHz	17	10.70	60
PE-0805FT473KTT	47 @ 2.52 MHz	+/-10%, +/- 5%	10 @ 2.52 MHz	14	13.80	55
PE-0805FT683KTT	68 @ 2.52 MHz	+/-10%, +/- 5%	8 @ 2.52 MHz	11	17.50	49


NOTES:

1. Inductance measured using a HP4286A RF Impedance Analyzer.
2. Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
3. SRF measured using a HP8753C Network Analyzer.
4. R_{DC} measured using a Valhalla Scientific model 4100 ATC Digital Ohmmeter.
5. Based on a 15°C maximum temperature rise.
6. Sample Kit Part Number: **PE-0805FTKIT-T**

WIRE-WOUND RF CHIP INDUCTORS - 0805FT SERIES




Typical Q vs. Frequency

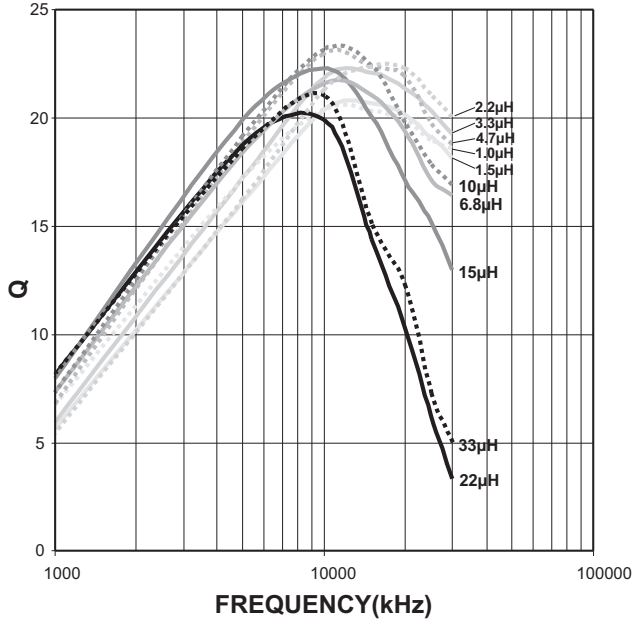


PE-0805FT102FTT	PE-0805FT152JTT
PE-0805FT222JTT	PE-0805FT332JTT
PE-0805FT472JTT	PE-0805FT682JTT
PE-0805FT103JTT	PE-0805FT153JTT
PE-0805FT223JTT	PE-0805FT333JTT

Typical Inductance vs. Frequency

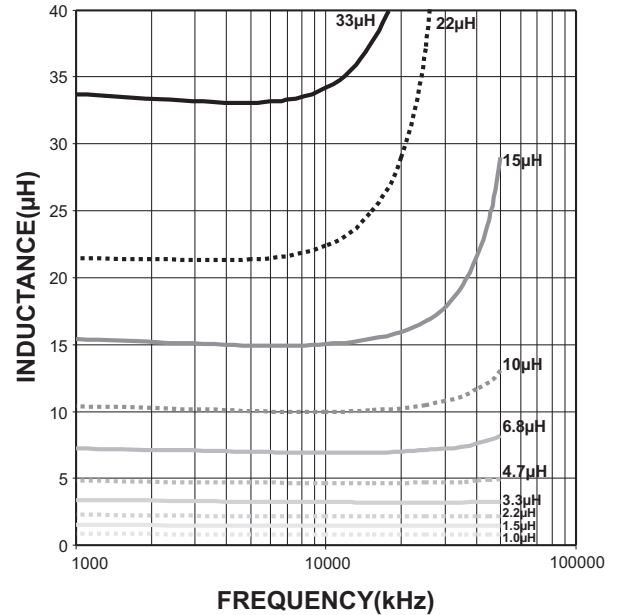


PE-0805FT102JTT	PE-0805FT152JTT
PE-0805FT222JTT	PE-0805FT332JTT
PE-0805FT472JTT	PE-0805FT682JTT
PE-0805FT103JTT	PE-0805FT153JTT
PE-0805FT223JTT	PE-0805FT333JTT



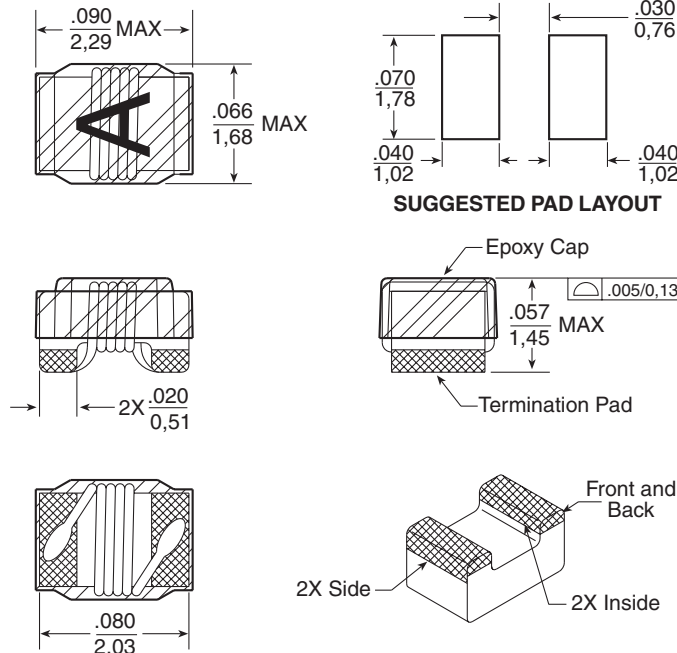

Mechanical

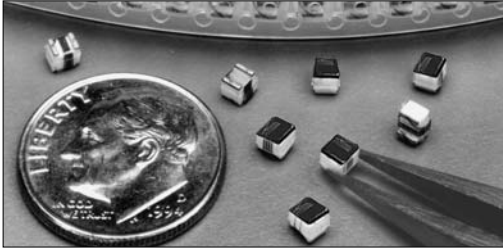

Weight 0.012 grams
Tape & Reel 2000/reel
Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Unless otherwise specified
 all tolerances are $\pm \frac{.010}{0.25}$

WIRE-WOUND RF CHIP INDUCTORS - 1008CD SERIES



-  Wirewound ceramic core construction
-  High Q values and high self-resonant frequency
-  Industry standard 1008 (2520) SMT land pattern
-  See page 3 for Competition Cross Reference

Electrical Specifications @ 25°C

Part Number	Inductance ¹ (nH)	Standard Tolerance	Optional Tolerance	Q ² (MIN)	SRF ³ (MHZ MIN)	Rdc ⁴ (Ω MAX)	Idc ⁵ (mA MAX)
PE-1008CD040KTT	4 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	50 @ 500 MHz	6000	0.15	600
PE-1008CD080KTT	8 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	50 @ 500 MHz	5000	0.22	600
PE-1008CD090KTT	9.7 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	50 @ 500 MHz	4100	0.09	1000
PE-1008CD100KTT	10 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	50 @ 500 MHz	4100	0.09	1000
PE-1008CD120KTT	12 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	50 @ 500 MHz	3300	0.09	1000
PE-1008CD140KTT	14.3 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	50 @ 500 MHz	1850	0.10	1000
PE-1008CD150KTT	15 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	50 @ 500 MHz	1850	0.10	1000
PE-1008CD180KTT	17.8 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	50 @ 350 MHz	2500	0.11	1000
PE-1008CD210KTT	20.9 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	55 @ 350 MHz	1800	0.12	1000
PE-1008CD220KTT	22 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	55 @ 350 MHz	1800	0.12	1000
PE-1008CD260KTT	26.2 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	55 @ 350 MHz	1500	0.13	1000
PE-1008CD270KTT	27 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	55 @ 350 MHz	1500	0.11	1000
PE-1008CD320KTT	31.8 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	60 @ 350 MHz	1600	0.16	1000
PE-1008CD330KTT	33 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	60 @ 350 MHz	1600	0.14	1000
PE-1008CD380KTT	38.2 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	60 @ 350 MHz	1400	0.15	1000
PE-1008CD390KTT	39 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	60 @ 350 MHz	1400	0.12	1000
PE-1008CD450KTT	44.9 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	65 @ 350 MHz	1200	0.16	1000
PE-1008CD470KTT	47 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	65 @ 350 MHz	1200	0.08	1000
PE-1008CD540KTT	54 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	65 @ 350 MHz	1150	0.18	1000
PE-1008CD560KTT	56 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	65 @ 350 MHz	1150	0.12	1000
PE-1008CD650KTT	65 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	65 @ 350 MHz	1100	0.20	1000
PE-1008CD680KTT	68 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	65 @ 350 MHz	1100	0.07	1000
PE-1008CD790KTT	79 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	60 @ 350 MHz	950	0.22	1000
PE-1008CD820KTT	82 @ 50 MHz	± 10% (K)	± 5% (J), ± 2% (G)	60 @ 350 MHz	950	0.14	1000
PE-1008CD960KTT	96.1 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	60 @ 350 MHz	900	0.56	650
PE-1008CD101KTT	100 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	60 @ 350 MHz	900	0.15	650
PE-1008CD121KTT	120 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	60 @ 350 MHz	950	0.63	650
PE-1008CD141KTT	145.7 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	625	0.70	580
PE-1008CD151KTT	150 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	625	0.16	580
PE-1008CD161KTT	160 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	625	0.77	600
PE-1008CD171KTT	170.2 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	650	0.77	620
PE-1008CD181KTT	180 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	650	0.77	620
PE-1008CD211KTT	216 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	625	0.84	500
PE-1008CD221KTT	220 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	625	0.84	500
PE-1008CD261KTT	260.5 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	525	0.91	500
PE-1008CD271KTT	270 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	525	0.91	500
PE-1008CD311KTT	313.6 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	500	1.05	450
PE-1008CD331KTT	330 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	500	1.05	450
PE-1008CD361KTT	365 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	500	1.12	470
PE-1008CD391KTT	390 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	475	1.12	470
PE-1008CD451KTT	447 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	450	1.19	420
PE-1008CD471KTT	470 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	450	1.19	420
PE-1008CD541KTT	535 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	415	1.33	310
PE-1008CD561KTT	560 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	415	1.33	310
PE-1008CD591KTT	586 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	375	1.40	300
PE-1008CD621KTT	620 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	375	1.40	300
PE-1008CD641KTT	636 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	375	1.47	230
PE-1008CD681KTT	680 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	375	1.47	230
PE-1008CD711KTT	708.8 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	360	1.54	200
PE-1008CD751KTT	750 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	350	1.61	200
PE-1008CD771KTT	768 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	325	1.61	180

(Continued on next page)

WIRE-WOUND RF CHIP INDUCTORS - 1008CD SERIES



Electrical Specifications @ 25°C (continued)


Part Number	Inductance ¹ (nH)	Standard Tolerance	Optional Tolerance	Q ² (MIN)	SRF ³ (MHz MIN)	R _{DC} ⁴ (Ω MAX)	I _{DC} ⁵ (mA MAX)
PE-1008CD821KTT	820 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	45 @ 100 MHz	325	1.61	180
PE-1008CD851KTT	849,8 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	35 @ 50 MHz	320	1.68	150
PE-1008CD911KTT	909,5 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	35 @ 50 MHz	290	1.75	150
PE-1008CD102KTT	1000 @ 25 MHz	± 10% (K)	± 5% (J), ± 2% (G)	35 @ 50 MHz	260	1.90	120
PE-1008CD112KTT	1184 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	35 @ 50 MHz	250	2.00	310
PE-1008CD122KTT	1200 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	35 @ 50 MHz	250	2.00	310
PE-1008CD142KTT	1470 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	28 @ 50 MHz	200	2.30	330
PE-1008CD152KTT	1500 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	28 @ 50 MHz	200	2.30	330
PE-1008CD182KTT	1792.9 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	28 @ 50 MHz	160	2.60	300
PE-1008CD212KTT	2154.5 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	28 @ 50 MHz	80	2.80	280
PE-1008CD222KTT	2200 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	28 @ 50 MHz	80	2.80	280
PE-1008CD262KTT	2646.8 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	22 @ 25 MHz	90	3.20	290
PE-1008CD272KTT	2700 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	22 @ 25 MHz	90	3.20	290
PE-1008CD322KTT	3207.6 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	22 @ 25 MHz	40	3.40	290
PE-1008CD332KTT	3300 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	22 @ 25 MHz	40	3.40	290
PE-1008CD372KTT	3758.2 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	20 @ 25 MHz	35	3.60	260
PE-1008CD392KTT	3900 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	20 @ 25 MHz	35	3.60	260
PE-1008CD452KTT	4526.2 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	20 @ 25 MHz	25	4.00	260
PE-1008CD472KTT	4700 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	20 @ 25 MHz	25	4.00	260
PE-1008CD562KTT	5600 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	20 @ 25 MHz	60	5.40	240
PE-1008CD682KTT	6800 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	18 @ 7.9 MHz	40	4.90	200
PE-1008CD822KTT	8200 @ 7.9 MHz	± 10% (K)	± 5% (J), ± 2% (G)	18 @ 7.9 MHz	25	6.00	160

For other inductance values in 1008 size, please refer to 1008CM (page 18-19), 1008CQ (page 20-21) and 1008FD (page 22-23).


Notes:

- Inductance measured using a HP4286A RF Impedance Analyzer.
- Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
- SRF measured using a HP8753C Network Analyzer.
- R_{DC} measured using Valhalla Scientific model 4100 ATC Digital Ohmmeter.
- Based on a 15°C maximum temperature rise.
- Sample Kit Part Number: **PE-1008CDKIT-T**
- Component Weight: 0.032 grams typical.
- These components are 0.055" in height.


Typical Q vs Frequency

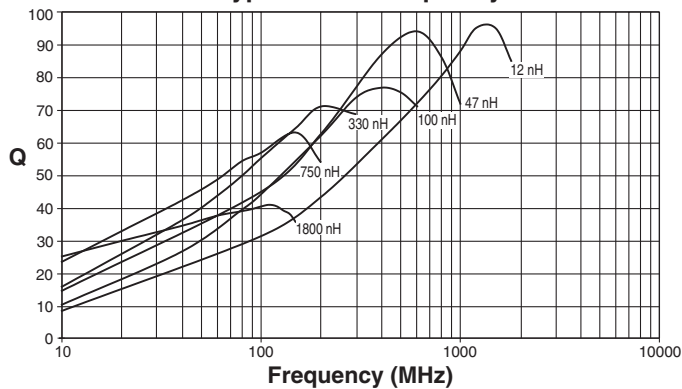

Typical Inductance vs Frequency

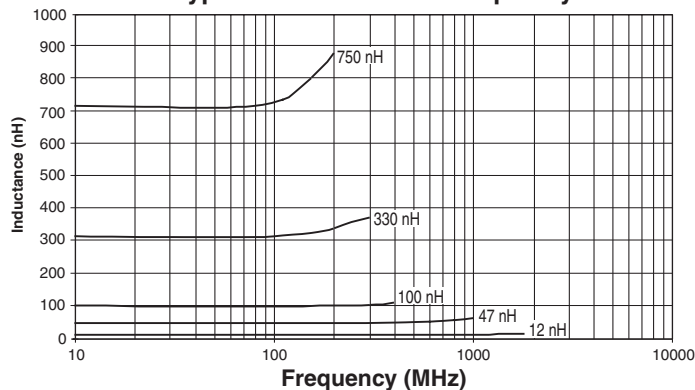


Mechanical

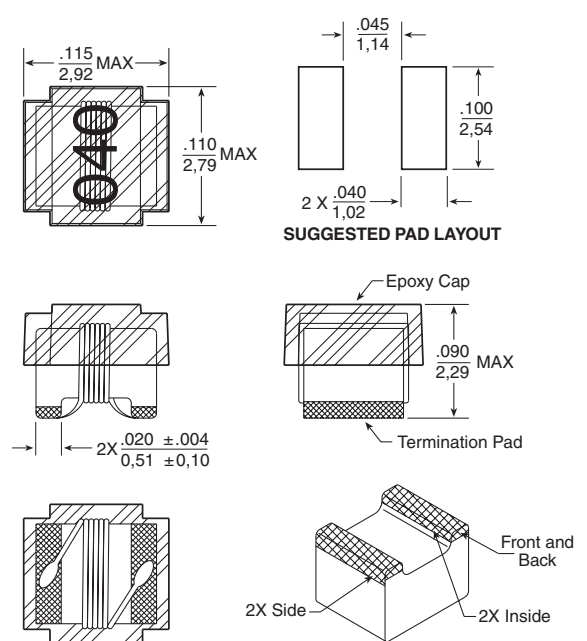

Dimensions: Inches
mm

Unless otherwise specified, all tolerances are ± .010
0,25

WIRE-WOUND RF CHIP INDUCTORS - 1008CM SERIES

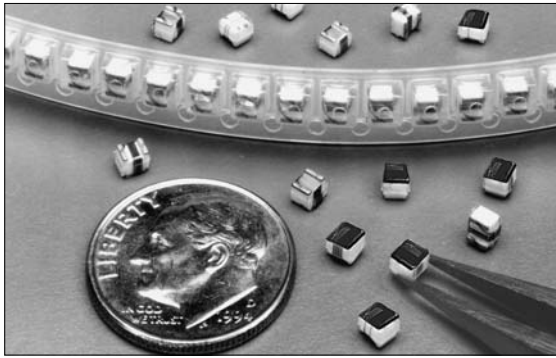

- ⊕ Wirewound ceramic core construction
- ⊕ High Q values
- ⊕ High self resonant frequency
- ⊕ Industry standard 1008 (2520) surface mount land pattern
- ⊕ See page 3 for Competition Cross Reference

Electrical Specifications @ 25°C

Part Number	Inductance ¹ (nH)	Standard Tolerance	Optional Tolerance	Q ² (MIN)	SRF Min ³ (MHz MIN)	R _{DC} ⁴ (Ω MAX)	I _{DC} ⁵ (mA MAX)
PE-1008CM040KTT	4.7 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	60 @ 1500 MHz	5500	0.05	1000
PE-1008CM080KTT	8.2 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	60 @ 1500 MHz	5500	0.05	1000
PE-1008CM100KTT	10 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	50 @ 500 MHz	4500	0.09	1000
PE-1008CM120KTT	12 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	65 @ 500 MHz	2300	0.09	1000
PE-1008CM150KTT	15 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	55 @ 500 MHz	1850	0.19	1000
PE-1008CM180KTT	18 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	55 @ 350 MHz	2200	0.06	1000
PE-1008CM220KTT	22 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	55 @ 350 MHz	1800	0.09	1000
PE-1008CM270KTT	27 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	60 @ 350 MHz	1500	0.11	1000
PE-1008CM330KTT	33 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	60 @ 350 MHz	1800	0.18	800
PE-1008CM390KTT	39 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	70 @ 350 MHz	1400	0.12	1000
PE-1008CM470KTT	47 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	70 @ 350 MHz	1200	0.08	1000
PE-1008CM560KTT	56 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	60 @ 350 MHz	1150	0.12	1000
PE-1008CM680KTT	68 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	70 @ 350 MHz	1100	0.07	1000
PE-1008CM820KTT	82 @ 50 MHz	±10% (K)	±5% (J), ±2% (G)	65 @ 350 MHz	950	0.14	950
PE-1008CM101KTT	100 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	65 @ 350 MHz	900	0.15	650
PE-1008CM121KTT	120 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	60 @ 350 MHz	825	0.22	650
PE-1008CM151KTT	150 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	50 @ 100 MHz	625	0.16	580
PE-1008CM161KTT	160 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	50 @ 100 MHz	625	0.25	600
PE-1008CM181KTT	180 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	50 @ 100 MHz	650	0.25	600
PE-1008CM201KTT	200 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	50 @ 100 MHz	630	0.24	580
PE-1008CM221KTT	220 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	50 @ 100 MHz	625	0.28	500
PE-1008CM271KTT	270 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	45 @ 100 MHz	525	0.50	500
PE-1008CM331KTT	330 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	50 @ 100 MHz	500	0.80	450
PE-1008CM371KTT	370 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	50 @ 100 MHz	490	0.80	430
PE-1008CM391KTT	390 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	50 @ 100 MHz	475	0.75	425
PE-1008CM401KTT	400 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	50 @ 100 MHz	470	0.75	420
PE-1008CM471KTT	470 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	50 @ 100 MHz	450	0.70	350
PE-1008CM561KTT	560 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	50 @ 100 MHz	425	0.80	350
PE-1008CM621KTT	620 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	45 @ 100 MHz	375	1.90	200
PE-1008CM681KTT	680 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	45 @ 100 MHz	375	2.30	200
PE-1008CM751KTT	750 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	45 @ 100 MHz	350	1.60	200
PE-1008CM821KTT	820 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	40 @ 100 MHz	325	3.30	200
PE-1008CM911KTT	910 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	40 @ 50 MHz	300	2.10	200
PE-1008CM102KTT	1000 @ 25 MHz	±10% (K)	±5% (J), ±2% (G)	40 @ 50 MHz	300	1.80	200
PE-1008CM122KTT	1200 @ 10 MHz	±10% (K)	±5% (J), ±2% (G)	40 @ 50 MHz	250	3.00	200
PE-1008CM152KTT	1500 @ 10 MHz	±10% (K)	±5% (J), ±2% (G)	40 @ 50 MHz	200	4.00	150
PE-1008CM182KTT	1800 @ 10 MHz	±10% (K)	±5% (J), ±2% (G)	40 @ 50 MHz	150	5.09	150
PE-1008CM222KTT	2200 @ 10 MHz	±10% (K)	±5% (J), ±2% (G)	30 @ 25 MHz	80	5.85	150
PE-1008CM272KTT	2700 @ 10 MHz	±10% (K)	±5% (J), ±2% (G)	30 @ 25 MHz	90	7.70	150
PE-1008CM332KTT	3300 @ 10 MHz	±10% (K)	±5% (J), ±2% (G)	25 @ 15 MHz	40	7.80	150
PE-1008CM392KTT	3900 @ 10 MHz	±10% (K)	±5% (J), ±2% (G)	20 @ 15 MHz	35	8.30	135
PE-1008CM472KTT	4700 @ 10 MHz	±10% (K)	±5% (J), ±2% (G)	16 @ 15 MHz	25	6.00	150


Notes:

1. Inductance measured using a HP4191A RF Impedance Analyzer.
2. Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
3. SRF measured using a HP8753C Network Analyzer.
4. R_{DC} measured using a Valhalla Scientific model 4100 ATC Digital Ohmmeter.
5. Based on a 15°C maximum temperature rise.
6. Component Weight: 0.032 grams typical.


WIRE-WOUND RF CHIP INDUCTORS - 1008CM SERIES





Typical Q vs Frequency

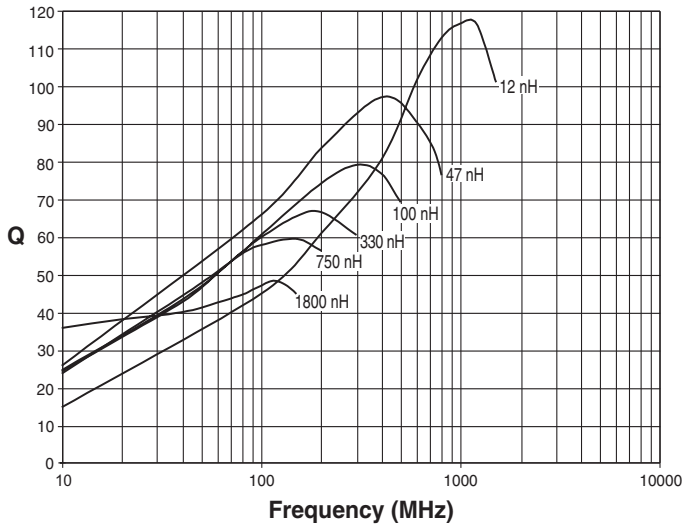

Typical Inductance vs Frequency

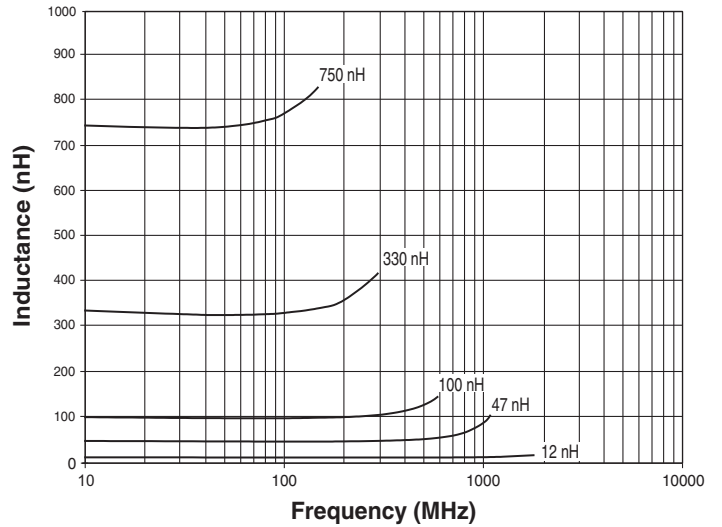





Mechanical



SUGGESTED PAD LAYOUT

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified
all tolerances are $\pm \frac{.010}{0,25}$

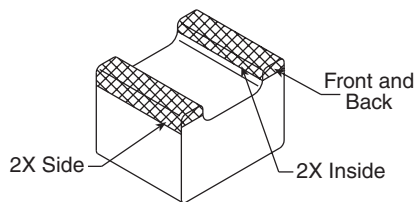

WIRE-WOUND RF CHIP INDUCTORS - 1008CQ SERIES



- ⦿ Wirewound ceramic core construction
- ⦿ High Q and high I_{dc} values
- ⦿ High self resonant frequency
- ⦿ Industry standard 1008 (2520) surface mount land pattern
- ⦿ See page 3 for Competition Cross Reference

Electrical Specifications @ 25°C

Part Number	Inductance ¹ (nH)	Standard Tolerance	Optional Tolerance	Q ² (MIN)	SRF Min ³ (MHz MIN)	R _{DC} ⁴ (Ω MAX)	I _{DC} ⁵ (mA MAX)
PE-1008CQ3N0KTT	3.0 @ 50 MHz	±10% (K)	±5% (J)	70 @ 1500 MHz	6000	0.04	1600
PE-1008CQ4N1KTT	4.1 @ 50 MHz	±10% (K)	±5% (J)	75 @ 1500 MHz	6000	0.05	1600
PE-1008CQ7N8KTT	7.8 @ 50 MHz	±10% (K)	±5% (J)	75 @ 1500 MHz	3800	0.05	1600
PE-1008CQ100KTT	10 @ 50 MHz	±10% (K)	±5% (J)	60 @ 500 MHz	3600	0.06	1600
PE-1008CQ120KTT	12 @ 50 MHz	±10% (K)	±5% (J)	70 @ 500 MHz	2800	0.06	1500
PE-1008CQ180KTT	18 @ 50 MHz	±10% (K)	±5% (J)	62 @ 350 MHz	2700	0.07	1400
PE-1008CQ220KTT	22 @ 50 MHz	±10% (K)	±5% (J)	62 @ 350 MHz	2050	0.07	1400
PE-1008CQ330KTT	33 @ 50 MHz	±10% (K)	±5% (J)	75 @ 350 MHz	1700	0.09	1300
PE-1008CQ390KTT	39 @ 50 MHz	±10% (K)	±5% (J)	75 @ 350 MHz	1300	0.09	1300
PE-1008CQ470KTT	47 @ 50 MHz	±10% (K)	±5% (J)	75 @ 350 MHz	1450	0.12	1200
PE-1008CQ560KTT	56 @ 50 MHz	±10% (K)	±5% (J)	75 @ 350 MHz	1230	0.12	1200
PE-1008CQ680KTT	68 @ 50 MHz	±10% (K)	±5% (J)	80 @ 350 MHz	1150	0.13	1100
PE-1008CQ820KTT	82 @ 50 MHz	±10% (K)	±5% (J)	80 @ 350 MHz	1060	0.16	1100
PE-1008CQ101KTT	100 @ 50 MHz	±10% (K)	±5% (J)	62 @ 350 MHz	820	0.16	1000
PE-1008CQ121KTT	120 @ 50 MHz	±10% (K)	±5% (J)	62 @ 350 MHz	800	0.17	1000
PE-1008CQ151KTT	150 @ 50 MHz	±10% (K)	±5% (J)	60 @ 350 MHz	750	0.21	950
PE-1008CQ181KTT	180 @ 50 MHz	±10% (K)	±5% (J)	40 @ 350 MHz	720	0.23	920
PE-1008CQ221KTT	220 @ 50 MHz	±10% (K)	±5% (J)	35 @ 350 MHz	680	0.29	900
PE-1008CQ271KTT	270 @ 50 MHz	±10% (K)	±5% (J)	35 @ 350 MHz	600	0.55	600
PE-1008CQ331KTT	330 @ 50 MHz	±10% (K)	±5% (J)	35 @ 100 MHz	550	0.60	550
PE-1008CQ391KTT	390 @ 50 MHz	±10% (K)	±5% (J)	35 @ 350 MHz	500	0.82	470


Notes:

1. Inductance measured using a HP4191A RF Impedance Analyzer.
2. Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
3. SRF measured using a HP8753C Network Analyzer.
4. R_{DC} measured using a Valhalla Scientific model 4100 ATC Digital Ohmmeter.
5. Based on a 15°C maximum temperature rise.
6. Component Weight: 0.032 grams typical.


WIRE-WOUND RF CHIP INDUCTORS - 1008CQ SERIES




Typical Q vs Frequency

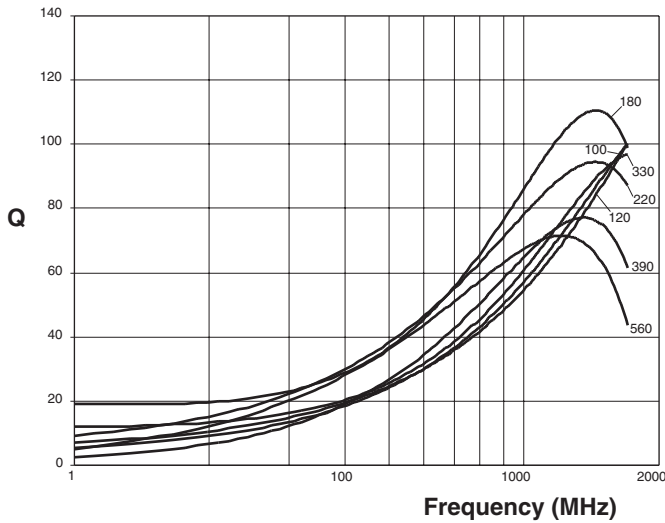

Typical Inductance vs Frequency

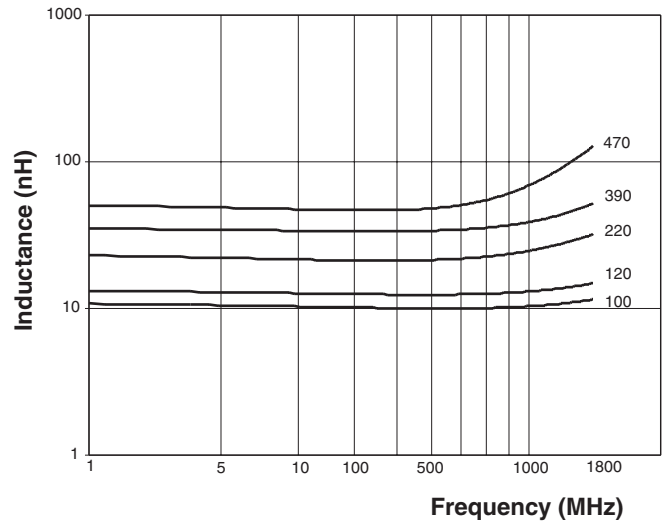


Mechanical

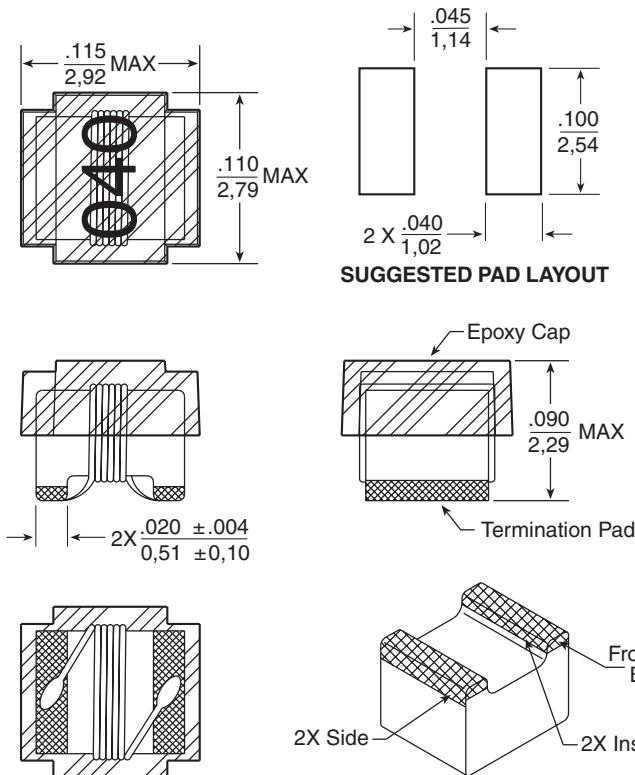

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified
all tolerances are $\pm .010$
 $0,25$

WIRE-WOUND RF CHIP INDUCTORS - 1008FD SERIES

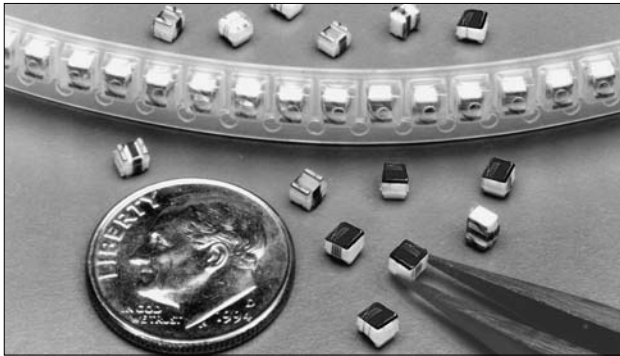

- Ⓢ Wirewound ferrite core construction
- Ⓢ High Inductance value and low R_{DC}
- Ⓢ Industry standard 1008 (2520) surface mount land pattern
- Ⓢ See page 3 for Competition Cross Reference

Electrical Specifications @ 25°C

Part Number	Inductance ¹ (μ H)	Standard Tolerance	Optional Tolerance	Q ² (MIN)	SRF Min ³ (MHz MIN)	R _{DC} ⁴ (Ω MAX)	I _{DC} ⁵ (mA MAX)
PE-1008FD151KTT	0.15 @ 25 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	45 @ 100 MHz	500	0.35	750
PE-1008FD181KTT	0.18 @ 25 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	45 @ 100 MHz	500	0.40	750
PE-1008FD331KTT	0.33 @ 25 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	45 @ 100 MHz	500	0.50	700
PE-1008FD122KTT	1.20 @ 7.9 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	48 @ 50 MHz	210	0.68	650
PE-1008FD152KTT	1.50 @ 7.9 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	41 @ 50 MHz	190	0.76	630
PE-1008FD182KTT	1.80 @ 7.9 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	39 @ 50 MHz	170	0.84	600
PE-1008FD222KTT	2.20 @ 7.9 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	34 @ 50 MHz	150	1.10	520
PE-1008FD272KTT	2.70 @ 7.9 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	34 @ 50 MHz	135	1.28	490
PE-1008FD332KTT	3.30 @ 7.9 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	32 @ 50 MHz	120	1.46	450
PE-1008FD392KTT	3.90 @ 7.9 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	32 @ 7.9 MHz	102	1.56	420
PE-1008FD472KTT	4.70 @ 7.9 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	31 @ 7.9 MHz	90	1.68	400
PE-1008FD562KTT	5.60 @ 7.9 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	31 @ 7.9 MHz	80	1.82	380
PE-1008FD682KTT	6.80 @ 7.9 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	31 @ 7.9 MHz	60	2.00	360
PE-1008FD822KTT	8.20 @ 7.9 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	23 @ 7.9 MHz	65	2.65	330
PE-1008FD103KTT	10.00 @ 7.9 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	31 @ 7.9 MHz	60	2.95	300


Notes:

1. Inductance measured using a HP4191A RF Impedance Analyzer.
2. Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
3. SRF measured using a HP8753C Network Analyzer.
4. R_{DC} measured using a Valhalla Scientific model 4100 ATC Digital Ohmmeter.
5. Based on a 15°C maximum temperature rise.
6. Component Weight: 0.032 grams typical.
7. Sample Kit Part Number: **PE-1008FDKIT-T**


WIRE-WOUND RF CHIP INDUCTORS - 1008FD SERIES





Typical Q vs Frequency

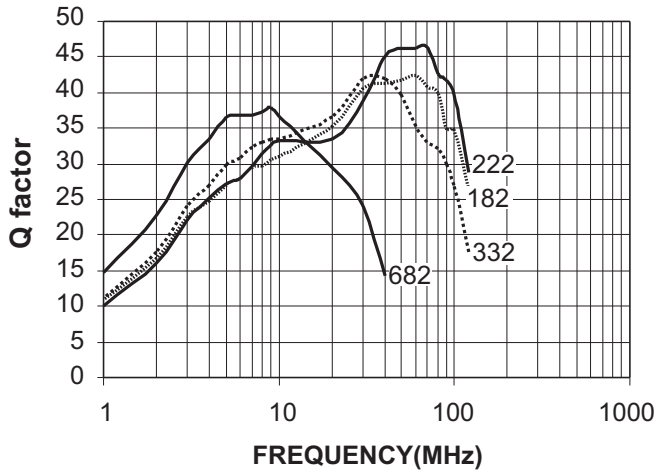



Typical Inductance vs Frequency

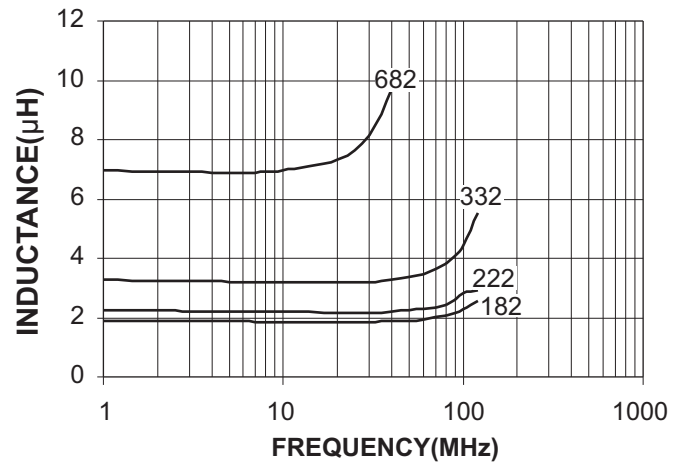



Mechanical




SUGGESTED PAD LAYOUT





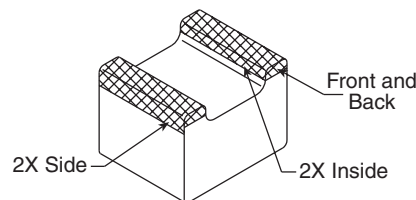

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified
all tolerances are $\pm \frac{.010}{0.25}$

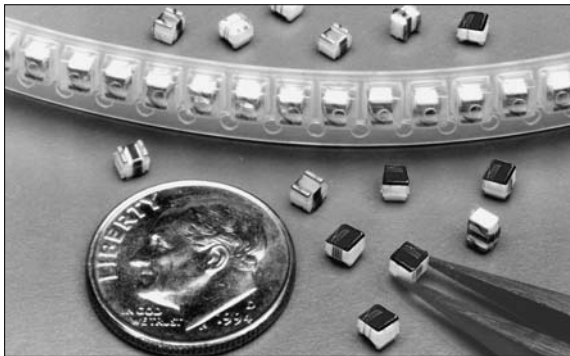

WIRE-WOUND RF CHIP INDUCTORS - 1210FT SERIES



-  Wirewound ferrite core construction
-  High Inductance value and low Rdc
-  Industry standard 1210 (3225) SMT land pattern
-  See page 3 for Competition Cross Reference

Electrical Specifications @ 25°C

Part Number	Inductance ¹ (μ H)	Standard Tolerance	Optional Tolerance	Q ² (MIN)	SRF Min ³ (MHz MIN)	Rdc ⁴ (Ω MAX)	I _{dc} ⁵ (mA MAX)
PE-1210FT100KTT	0.010 @ 100 MHz	± 10% (K)	± 5% (J)	15 @ 100 MHz	2500	0.13	450
PE-1210FT120KTT	0.012 @ 100 MHz	± 10% (K)	± 5% (J)	17 @ 100 MHz	2300	0.14	450
PE-1210FT150KTT	0.015 @ 100 MHz	± 10% (K)	± 5% (J)	19 @ 100 MHz	2100	0.16	450
PE-1210FT180KTT	0.018 @ 100 MHz	± 10% (K)	± 5% (J)	21 @ 100 MHz	1900	0.18	450
PE-1210FT220KTT	0.022 @ 100 MHz	± 10% (K)	± 5% (J)	23 @ 100 MHz	1700	0.20	450
PE-1210FT270KTT	0.027 @ 100 MHz	± 10% (K)	± 5% (J)	23 @ 100 MHz	1500	0.22	450
PE-1210FT330KTT	0.033 @ 100 MHz	± 10% (K)	± 5% (J)	25 @ 100 MHz	1400	0.24	450
PE-1210FT390KTT	0.039 @ 100 MHz	± 10% (K)	± 5% (J)	25 @ 100 MHz	1300	0.27	450
PE-1210FT470KTT	0.047 @ 100 MHz	± 10% (K)	± 5% (J)	26 @ 100 MHz	1200	0.30	450
PE-1210FT560KTT	0.056 @ 100 MHz	± 10% (K)	± 5% (J)	26 @ 100 MHz	1100	0.33	450
PE-1210FT680KTT	0.068 @ 100 MHz	± 10% (K)	± 5% (J)	27 @ 100 MHz	1000	0.36	450
PE-1210FT820KTT	0.082 @ 100 MHz	± 10% (K)	± 5% (J)	27 @ 100 MHz	900	0.40	450
PE-1210FT101KTT	0.100 @ 100 MHz	± 10% (K)	± 5% (J)	28 @ 100 MHz	700	0.44	450
PE-1210FT121KTT	0.120 @ 25.2 MHz	± 10% (K)	± 5% (J)	30 @ 25.2 MHz	500	0.22	450
PE-1210FT151KTT	0.150 @ 25.2 MHz	± 10% (K)	± 5% (J)	30 @ 25.2 MHz	450	0.25	450
PE-1210FT181KTT	0.180 @ 25.2 MHz	± 10% (K)	± 5% (J)	30 @ 25.2 MHz	400	0.28	450
PE-1210FT221KTT	0.220 @ 25.2 MHz	± 10% (K)	± 5% (J)	30 @ 25.2 MHz	350	0.32	450
PE-1210FT271KTT	0.270 @ 25.2 MHz	± 10% (K)	± 5% (J)	30 @ 25.2 MHz	320	0.36	450
PE-1210FT331KTT	0.330 @ 25.2 MHz	± 10% (K)	± 5% (J)	30 @ 25.2 MHz	300	0.40	450
PE-1210FT391KTT	0.390 @ 25.2 MHz	± 10% (K)	± 5% (J)	30 @ 25.2 MHz	250	0.45	450
PE-1210FT471KTT	0.470 @ 25.2 MHz	± 10% (K)	± 5% (J)	30 @ 25.2 MHz	220	0.50	450
PE-1210FT561KTT	0.560 @ 25.2 MHz	± 10% (K)	± 5% (J)	30 @ 25.2 MHz	180	0.55	450
PE-1210FT681KTT	0.680 @ 25.2 MHz	± 10% (K)	± 5% (J)	30 @ 25.2 MHz	160	0.60	450
PE-1210FT821KTT	0.820 @ 25.2 MHz	± 10% (K)	± 5% (J)	30 @ 25.2 MHz	140	0.65	450
PE-1210FT102KTT	1.000 @ 7.96 MHz	± 10% (K)	± 5% (J)	30 @ 7.96 MHz	120	0.70	400
PE-1210FT122KTT	1.200 @ 7.96 MHz	± 10% (K)	± 5% (J)	30 @ 7.96 MHz	100	0.75	390
PE-1210FT152KTT	1.500 @ 7.96 MHz	± 10% (K)	± 5% (J)	30 @ 7.96 MHz	85	0.85	370
PE-1210FT182KTT	1.800 @ 7.96 MHz	± 10% (K)	± 5% (J)	30 @ 7.96 MHz	80	0.90	350
PE-1210FT222KTT	2.200 @ 7.96 MHz	± 10% (K)	± 5% (J)	30 @ 7.96 MHz	75	1.00	320
PE-1210FT272KTT	2.700 @ 7.96 MHz	± 10% (K)	± 5% (J)	30 @ 7.96 MHz	70	1.10	290
PE-1210FT332KTT	3.300 @ 7.96 MHz	± 10% (K)	± 5% (J)	30 @ 7.96 MHz	60	1.20	260
PE-1210FT392KTT	3.900 @ 7.96 MHz	± 10% (K)	± 5% (J)	30 @ 7.96 MHz	55	1.30	250
PE-1210FT472KTT	4.700 @ 7.96 MHz	± 10% (K)	± 5% (J)	30 @ 7.96 MHz	50	1.50	224
PE-1210FT562KTT	5.600 @ 7.96 MHz	± 10% (K)	± 5% (J)	30 @ 7.96 MHz	45	1.60	204
PE-1210FT682KTT	6.800 @ 7.96 MHz	± 10% (K)	± 5% (J)	30 @ 7.96 MHz	40	1.80	180
PE-1210FT822KTT	8.200 @ 7.96 MHz	± 10% (K)	± 5% (J)	30 @ 7.96 MHz	35	2.00	170
PE-1210FT103KTT	10.000 @ 2.52 MHz	± 10% (K)	± 5% (J)	30 @ 2.52 MHz	30	2.10	150
PE-1210FT123KTT	12.000 @ 2.52 MHz	± 10% (K)	± 5% (J)	30 @ 2.52 MHz	20	2.50	140


Notes:

1. Inductance measured using a HP4286A RF Impedance Analyzer.
2. Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
3. SRF measured using a HP8753C Network Analyzer.
4. R_{DC} measured using a Valhalla Scientific model 4100 ATC Digital Ohmmeter.
5. Based on a 15°C maximum temperature rise.
6. Sample Kit Part Number: **PE-1210FT KIT-T**.
7. Component Weight: 0.045 grams typical.
8. These components are 0.0944" in height.


WIRE-WOUND RF CHIP INDUCTORS - 1210FT SERIES




Typical Q vs Frequency

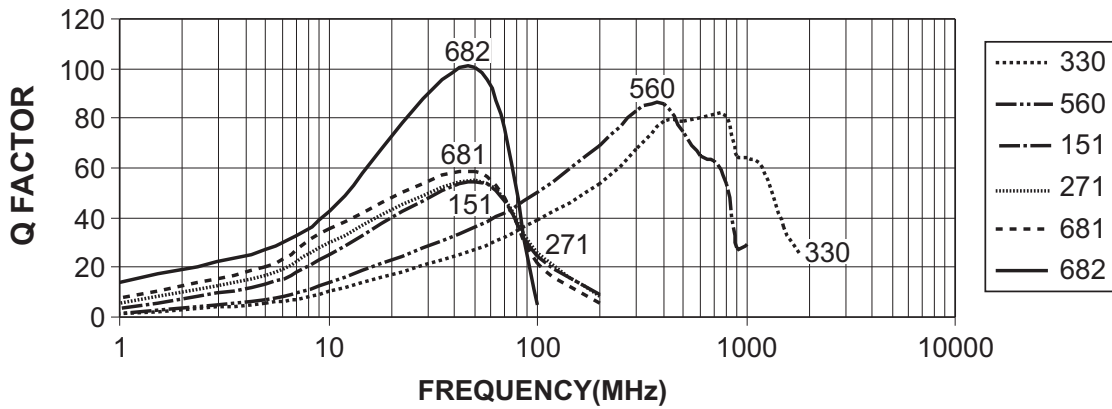


Typical Inductance vs Frequency

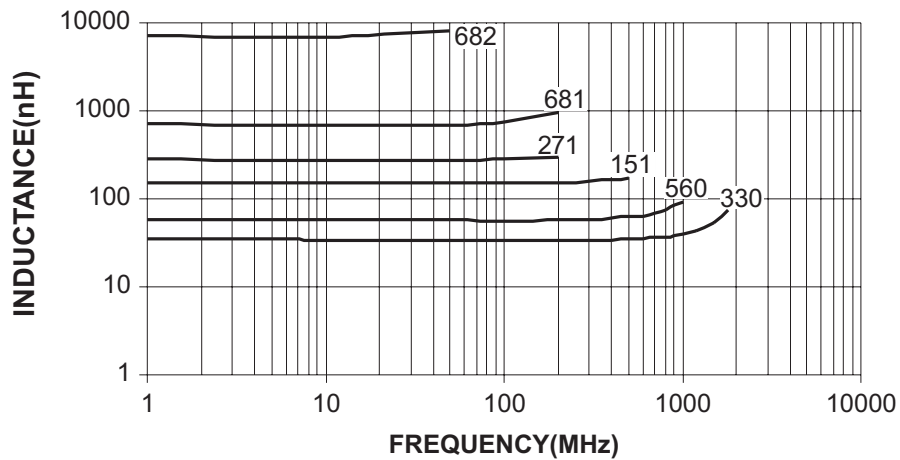



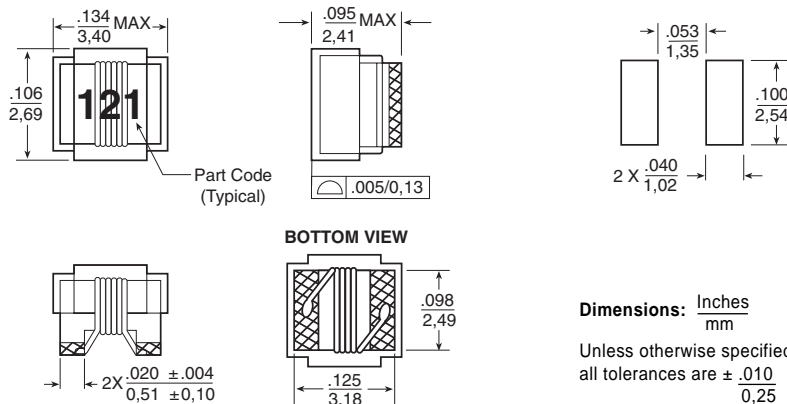

Mechanical

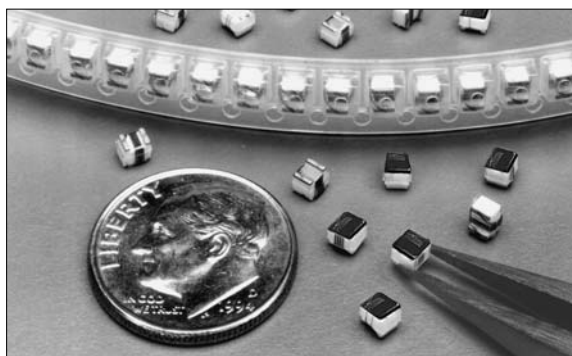

WIRE-WOUND RF CHIP INDUCTORS - 1206CD SERIES



-  Wirewound ceramic core construction
-  High Inductance value and high self resonant frequency
-  Industry standard 1206 (3216) SMT land pattern
-  See page 3 for Competition Cross Reference

Electrical Specifications @ 25°C

Part Number	Inductance ¹ (nH)	Standard Tolerance	Optional Tolerance	Q ² (MIN)	SRF Min ³ (MHz MIN)	R _{DC} ⁴ (Ω MAX)	I _{DC} ⁵ (mA MAX)
PE-1206CD030KTT	3.3 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	30 @ 300 MHz	6200	0.05	1000
PE-1206CD060KTT	6.8 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	30 @ 300 MHz	5500	0.07	1000
PE-1206CD100KTT	10 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	40 @ 300 MHz	4000	0.08	1000
PE-1206CD120KTT	12 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	40 @ 300 MHz	3200	0.08	1000
PE-1206CD150KTT	15 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	40 @ 300 MHz	3200	0.10	1000
PE-1206CD180KTT	18 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	50 @ 300 MHz	2800	0.10	1000
PE-1206CD220KTT	22 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	50 @ 300 MHz	2200	0.10	1000
PE-1206CD270KTT	27 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	50 @ 300 MHz	1800	0.11	1000
PE-1206CD330KTT	33 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	55 @ 300 MHz	1800	0.11	1000
PE-1206CD390KTT	39 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	55 @ 300 MHz	1800	0.12	1000
PE-1206CD470KTT	47 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	55 @ 300 MHz	1500	0.13	1000
PE-1206CD560KTT	56 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	55 @ 300 MHz	1450	0.14	1000
PE-1206CD680KTT	68 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	55 @ 300 MHz	1200	0.26	900
PE-1206CD820KTT	82 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	55 @ 300 MHz	1200	0.21	900
PE-1206CD101KTT	100 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	55 @ 300 MHz	1100	0.26	850
PE-1206CD121KTT	120 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	60 @ 300 MHz	1100	0.26	800
PE-1206CD151KTT	150 @ 100 MHz	± 10% (K)	± 20% (M), ± 5% (J)	60 @ 300 MHz	950	0.31	750
PE-1206CD181KTT	180 @ 50 MHz	± 10% (K)	± 20% (M), ± 5% (J)	60 @ 300 MHz	900	0.43	700
PE-1206CD221KTT	220 @ 50 MHz	± 10% (K)	± 20% (M), ± 5% (J)	60 @ 300 MHz	760	0.50	670
PE-1206CD271KTT	270 @ 50 MHz	± 10% (K)	± 20% (M), ± 5% (J)	55 @ 300 MHz	730	0.56	630
PE-1206CD331KTT	330 @ 50 MHz	± 10% (K)	± 20% (M), ± 5% (J)	45 @ 150 MHz	650	0.62	590
PE-1206CD391KTT	390 @ 50 MHz	± 10% (K)	± 20% (M), ± 5% (J)	45 @ 150 MHz	600	0.75	530
PE-1206CD471KTT	470 @ 50 MHz	± 10% (K)	± 20% (M), ± 5% (J)	45 @ 150 MHz	550	1.30	490
PE-1206CD561KTT	560 @ 35 MHz	± 10% (K)	± 20% (M), ± 5% (J)	45 @ 150 MHz	470	1.34	460
PE-1206CD621KTT	620 @ 35 MHz	± 10% (K)	± 20% (M), ± 5% (J)	45 @ 150 MHz	470	1.58	430
PE-1206CD681KTT	680 @ 35 MHz	± 10% (K)	± 20% (M), ± 5% (J)	45 @ 150 MHz	450	1.58	430
PE-1206CD751KTT	750 @ 35 MHz	± 10% (K)	± 20% (M), ± 5% (J)	45 @ 150 MHz	440	2.25	400
PE-1206CD821KTT	820 @ 35 MHz	± 10% (K)	± 20% (M), ± 5% (J)	45 @ 150 MHz	420	1.82	400
PE-1206CD911KTT	910 @ 35 MHz	± 10% (K)	± 20% (M), ± 5% (J)	45 @ 150 MHz	410	2.95	400
PE-1206CD102KTT	1000 @ 35 MHz	± 10% (K)	± 20% (M), ± 5% (J)	45 @ 150 MHz	400	2.80	320
PE-1206CD122KTT	1200 @ 35 MHz	± 10% (K)	± 20% (M), ± 5% (J)	45 @ 150 MHz	380	3.20	300


Notes:

1. Inductance measured using a HP4286A RF Impedance Analyzer.
2. Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
3. SRF measured using a HP8753C Network Analyzer.
4. R_{DC} measured using a Valhalla Scientific model 4100 ATC Digital Ohmmeter.
5. Based on a 15°C maximum temperature rise.
6. Sample Kit Part Number: **PE-1206CD KIT-T**
7. Component Weight: 0.035 grams typical.
8. These components are 0.060" in height.


WIRE-WOUND RF CHIP INDUCTORS - 1206CD SERIES




Typical Q vs Frequency

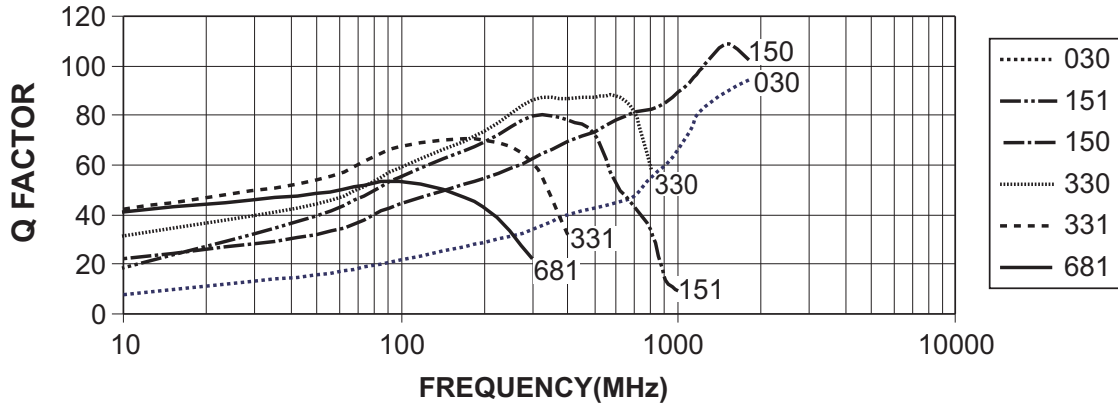


Typical Inductance vs Frequency

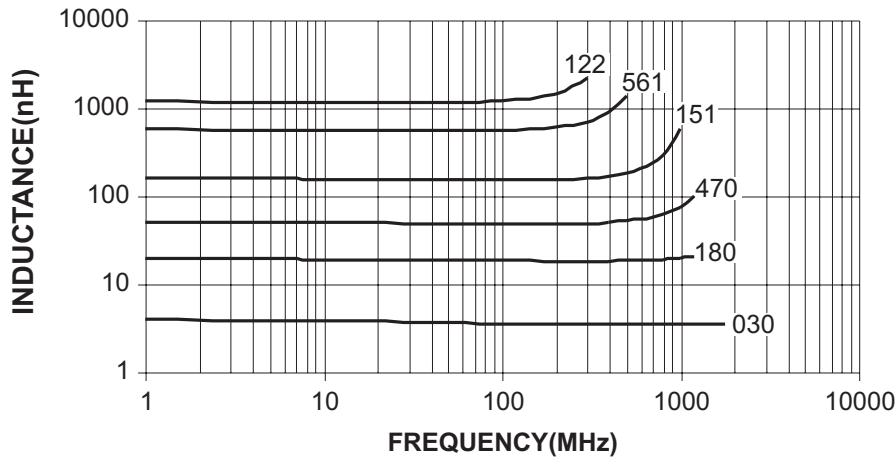



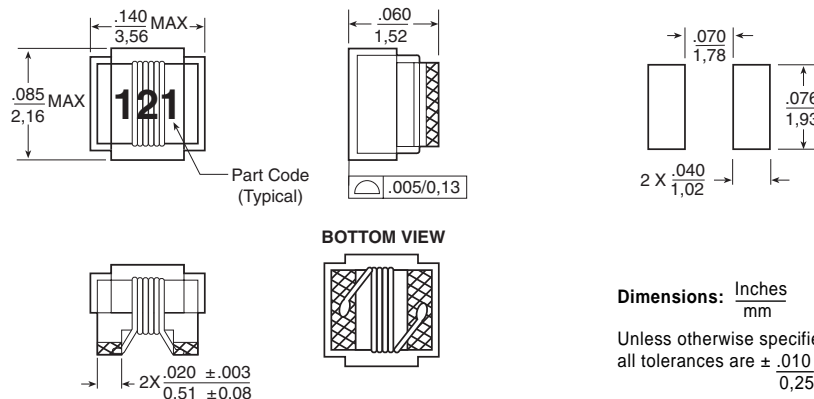

Mechanical

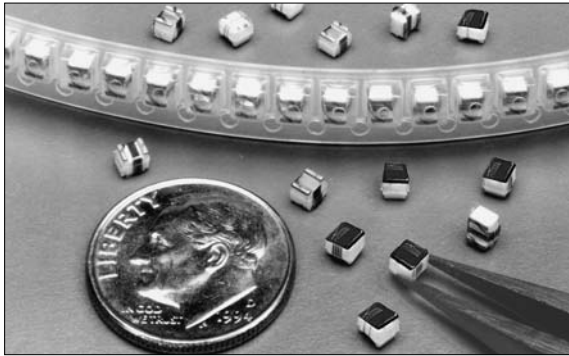

WIRE-WOUND RF CHIP INDUCTORS - 1812FD SERIES



-  Wirewound ferrite core construction
-  High Inductance value and low Rdc
-  Industry standard 1812 (4532) SMT land pattern
-  See page 3 for Competition Cross Reference

Electrical Specifications @ 25°C

Part Number	Inductance ¹ (μ H)	Standard Tolerance	Optional Tolerance	Q ² (MIN)	SRF Min ³ (MHz MIN)	Rdc ⁴ (Ω MAX)	Ibc ⁵ (mA MAX)
PE-1812FD602KTT	6 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	30 @ 2.5 MHz	70.0	1.4	550
PE-1812FD123KTT	12 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	40 @ 2.5 MHz	55.0	2.0	310
PE-1812FD153KTT	15 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	40 @ 2.5 MHz	45.0	2.5	290
PE-1812FD183KTT	18 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	45 @ 2.5 MHz	36.0	2.8	270
PE-1812FD223KTT	22 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	45 @ 2.5 MHz	32.0	3.2	260
PE-1812FD273KTT	27 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	45 @ 2.5 MHz	27.0	3.6	240
PE-1812FD333KTT	33 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	45 @ 2.5 MHz	23.0	4.0	230
PE-1812FD393KTT	39 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	45 @ 2.5 MHz	18.0	4.5	210
PE-1812FD473KTT	47 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	40 @ 2.5 MHz	16.0	5.0	200
PE-1812FD563KTT	56 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	40 @ 2.5 MHz	13.0	5.5	190
PE-1812FD683KTT	68 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	40 @ 2.5 MHz	10.0	6.0	180
PE-1812FD823KTT	82 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	40 @ 2.5 MHz	9.0	7.0	170
PE-1812FD104KTT	100 @ 2.5 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	35 @ 2.5 MHz	8.5	8.0	150
PE-1812FD124KTT	120 @ 0.79 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	30 @ 0.79 MHz	8.5	11.5	135
PE-1812FD154KTT	150 @ 0.79 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	33 @ 0.79 MHz	8.5	13.0	125
PE-1812FD184KTT	180 @ 0.79 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	33 @ 0.79 MHz	8.0	14.2	120
PE-1812FD224KTT	220 @ 0.79 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	34 @ 0.79 MHz	6.0	16.2	115
PE-1812FD274KTT	270 @ 0.79 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	34 @ 0.79 MHz	5.0	20.5	105
PE-1812FD334KTT	330 @ 0.79 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	34 @ 0.79 MHz	4.5	22.5	100
PE-1812FD394KTT	390 @ 0.79 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	34 @ 0.79 MHz	3.5	24.5	90
PE-1812FD474KTT	470 @ 0.79 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	34 @ 0.79 MHz	3.0	26.5	85
PE-1812FD564KTT	560 @ 0.79 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	30 @ 0.79 MHz	2.0	28.5	75
PE-1812FD684KTT	680 @ 0.79 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	30 @ 0.79 MHz	1.6	38.0	60
PE-1812FD824KTT	820 @ 0.79 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	27 @ 0.79 MHz	1.6	41.0	55
PE-1812FD105KTT	1000 @ 0.79 MHz	$\pm 10\%$ (K)	$\pm 5\%$ (J)	27 @ 0.79 MHz	1.4	44.0	50


Notes:

1. Inductance measured using a HP4286A RF Impedance Analyzer.
2. Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
3. SRF measured using a HP8753C Network Analyzer.
4. R_{DC} measured using a Valhalla Scientific model 4100 ATC Digital Ohmmeter.
5. Based on a 15°C maximum temperature rise.
6. Sample Kit Part Number: **PE-1812FD KIT-T**.
7. Component Weight: 0.045 grams typical.
8. These components are 0.0944" in height.


WIRE-WOUND RF CHIP INDUCTORS - 1812FD SERIES




Typical Q vs Frequency

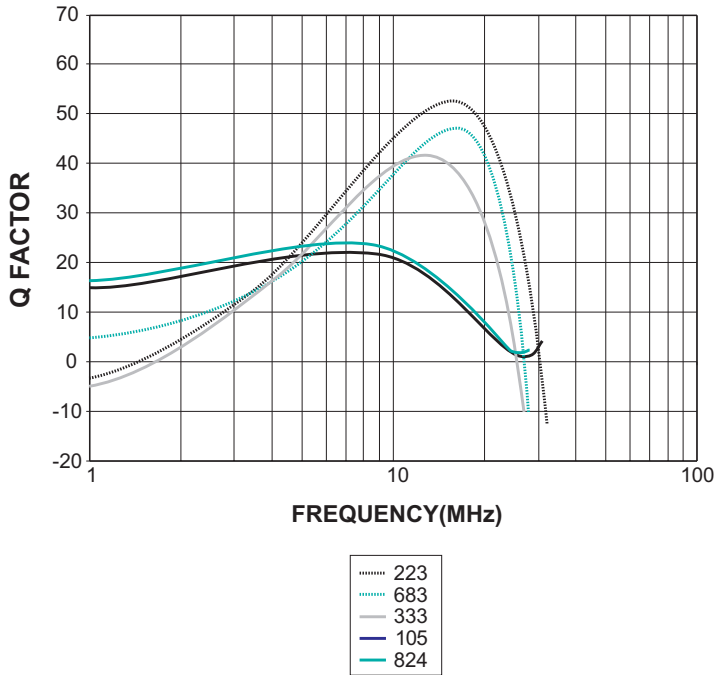

Typical Inductance vs Frequency

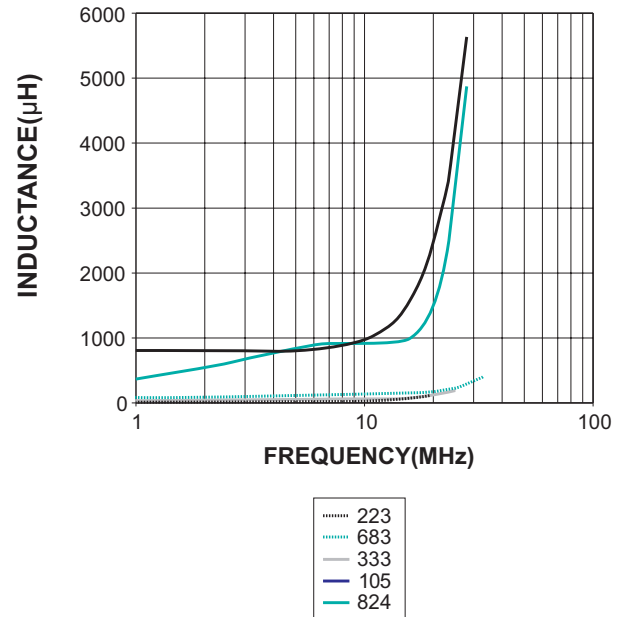

Mechanical

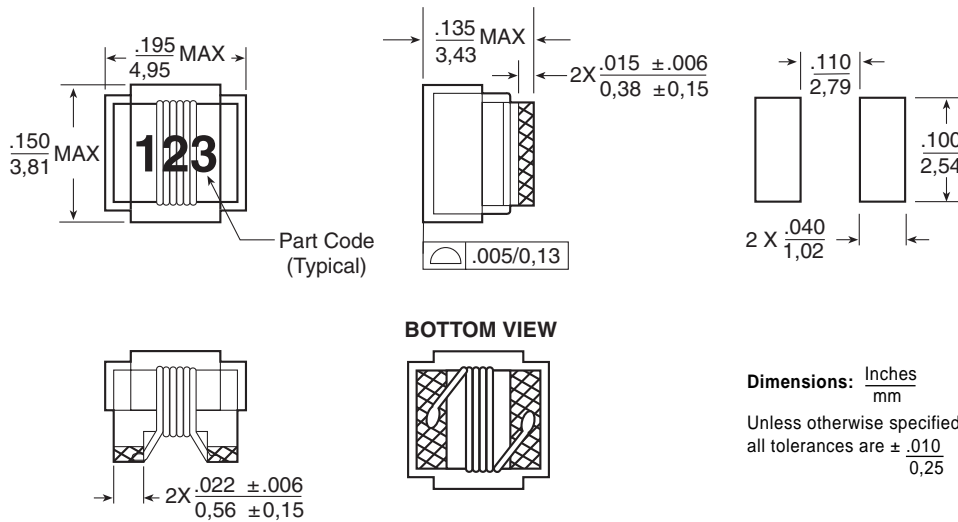

WIRE-WOUND RF CHIP INDUCTORS

Application Notes



The Basics of Wire-Wound Chip Inductors

Pulse currently supplies high quality magnetic products to companies such as 3COM, Cisco, Ericsson, Intel, Marconi, Nokia and Nortel and has been active in the field of RF engineering, since the launch of its first wire-wound 1008 chip product in 1982. Pulse now offers seven ranges of wire-wound chip from 0402 to 1812 (see table 1.0 below): the "CD Range" with 100% compatibility to other market leaders, and the "CM and CQ ranges" with improved electrical performance or alternative inductance values with a ceramic core construction; the FD and FT series with a Ferrite core construction.

In recent years, Pulse has leveraged its strength within the Telecoms and Networking industry to extend its product range to encompass RF products for the Cable Modem, CATV, MMDS and TETRA markets. Pulse now also offers Wide Bandwidth RF Transformers, Splitter Combiners, Couplers, Diplexers, Low Pass Filters and High Power Impedance Matching Transformers. To explore the complete range of RF products, visit the Pulse website:

http://www.pulseeng.com/Products/finder/rf_hfc_cable.htm for cable products and

<http://www.pulseeng.com/scripts/finder/rfind/mcis.cfm> for RF chip inductors.

Pulse Part No.	Inductance Range (nH)	Number of Values	Tolerance Range	Availability
PE-0402CD	1.0 ~ 120	48	5 & 10%	In Mass Production
PE-0603CD	1.6 ~ 390	55	2, 5 & 10%	In Mass Production
PE-0805CD	2.8 ~ 1500	40	2, 5 & 10%	In Mass Production
PE-0805CM	3.3 ~ 820	27	2, 5 & 10%	In Mass Production
PE-0805FT	1000 ~ 68000	12	5 & 10%	In Mass Production
PE-1008CD	4.0 ~ 8200	73	2, 5 & 10%	In Mass Production
PE-1008CM	4.7 ~ 4700	42	2, 5 & 10%	In Mass Production
PE-1008CQ	3.0 ~ 390	21	5 & 10%	In Mass Production
PE-1008FD	150 ~ 10000	15	5 & 10%	In Mass Production
PE-1210FT	10 ~ 12000	39	5 & 10%	In Mass Production
PE-1206CD	3.3 ~ 1200	31	5, 10 & 20%	In Mass Production
PE-1812FD	6.0µH ~ 1000µH	25	5 & 10%	In Mass Production

Table 1.0 Pulse Chip Inductor Product Range

Competing Chip Inductor Types

Capacitor and resistors are available in a wide variety of sizes and component values and it is possible to purchase almost any value, tolerance or other rating. Inductors, on the other hand, are not so readily available and engineers may find it necessary to wind their own inductors to get a specific value of inductance.

There are mainly 3 varieties of inductor in common use today and they are wire-wound, multi-layer and drum core chip inductors. The primary differences between these competing types are the core material used to enhance the inductance of coil and the construction method. Wire is wound around a ceramic or ferrite bobbin or in the case of multi-layer the coil is formed by interconnecting layers of conductive material printed on a ceramic substrate.

Table 2.0 indicates that the performance merits of wire-wound inductors versus the alternative multi-layer and drum core platforms. If price were the only consideration then, of course, there would be no market available for wire-wound chip inductors. But price is not the only consideration, since RF engineers must also consider the needs of the application in terms of Q factor, I_{dc} (maximum current carrying capacity), R_{dc} (resistance at dc), Tolerance and SRF (self-resonant or series resonant frequency).

SMT	Technology	Material Substrate	Q Factor	SRF	I _{dc}	Tolerance
Chip Inductor	Wire-wound	Ceramic	High	High	High	Good
Chip Inductor	Wire-wound	Ferrite	Low	Low	High	Poor
Multi-layer	Printed	Ceramic	Low	Low	Low	Poor
Drum Core	Wire-wound	Ferrite	Low	Low	Low	Poor

Table 2.0 Summary of Chip Inductor Relative Performance

WIRE-WOUND RF CHIP INDUCTORS

Application Notes

The Inductor Basics

An inductor is formed by winding a wire around a ceramic or ferrite core to increase the magnetic flux linkage between the turns of the coil. The majority of high frequency inductors above 50MHz are formed on a ceramic bobbin or substrate. Nonmagnetic cores (ceramic cores) have the opposite effect to a magnetic core in that they reduce instead of increase the inductance of the coil. Ceramic cores are mainly used to reduce the RF core losses as the high frequency currents mainly flow near the surface of the conductor. The resistance that a conductor offers to the high frequency alternating current is much greater than the resistance of the same conductor to direct current (dc) and is known as the skin effect. The skin effect is a characteristic of conductors that carry alternating current and is much more pronounced in coils than in straight conductors.

Skin effect causes the current in the conductor to be much denser near the surface of the conductor than at its centre. Consequentially, as the instantaneous value of the alternating current changes the inductance of a conductor in its interior is much greater than the instantaneous inductance near its surface. The result is more current flows near the surface or "skin" of the conductor than at its centre. Since the inductance of the coil increases proportionally to the increasing frequency, the skin effect also increases as the frequency is increased.

Another source of loss is the dielectric material used to form the body of the inductor. There is no perfect insulator and so dielectric losses can not be avoided at very high frequencies. Dielectric losses, like skin effect also tend to increase the effective resistance of a coil at high frequencies.

Whilst there is no perfect component compared to a resistor or capacitor, inductors are probably the component most prone to changing its performance over frequency. Figure 1.0 illustrates what a real world inductor looks like at RF frequencies and the resultant equivalent circuit.

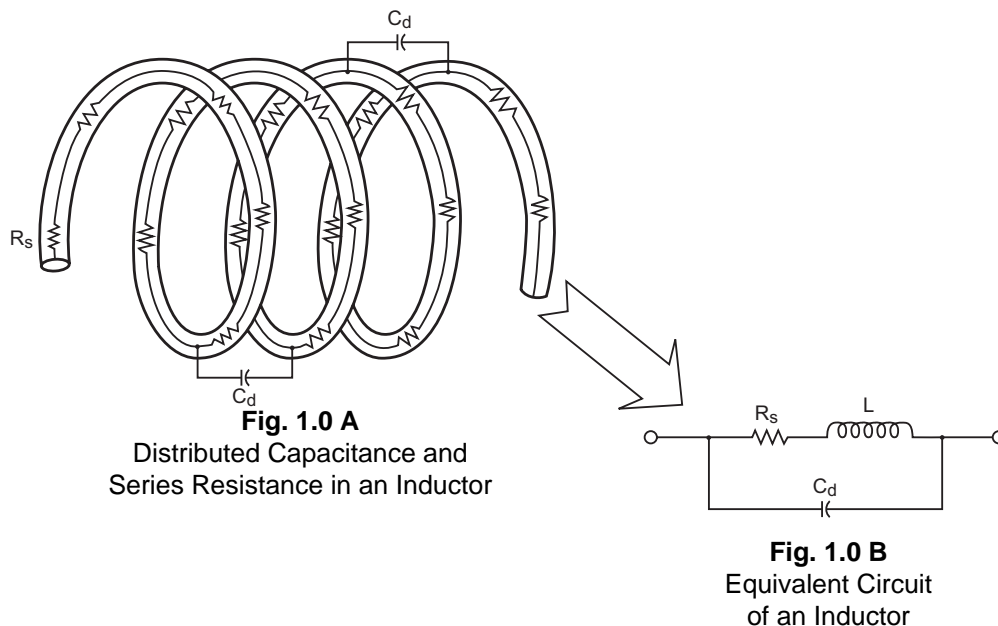


Fig. 1.0 A shows how capacitive coupling (C_d) can occur between two wires, when the wires are placed in close proximity to one another and only separated by a dielectric. The resistance (R_s) is a representation of the wire resistance that exists in a wire. **Fig. 1.0 B** shows a representation of the lumped resistive, capacitive and inductive component elements of an inductor.

WIRE-WOUND RF CHIP INDUCTORS

Application Notes



The Inductor Basics *(continued)*

The effect of C_d can have a dramatic effect upon the impedance of the inductor as illustrated in Fig 2.0, because "fringe" effects become dominant at high frequencies. At low frequencies the inductor's reactance parallels that of an ideal inductor. With increasing frequency the reactance of the inductor departs from the ideal curve and increases at a much faster rate until it reaches a peak value at the inductor's parallel resonant frequency (F_r). Above F_r the inductor's reactance begins to decrease with increasing frequency and thus the inductor begins to look like a capacitor. The series resistance (R_s) of the coil prevents the impedance of the inductor from reaching infinity at resonance (F_r). Another effect of R_s is to broaden the resonant peak of the impedance curve at F_r .

Comparisons made between inductors at near to F_r will produce an inaccurate representation of the inductor's performance. This can lead to problems in the end application since the performance of one inductor to another may vary quite markedly since the performance of the inductor is dominated by the parasitic content (distributed capacitance C_d) of the inductor.

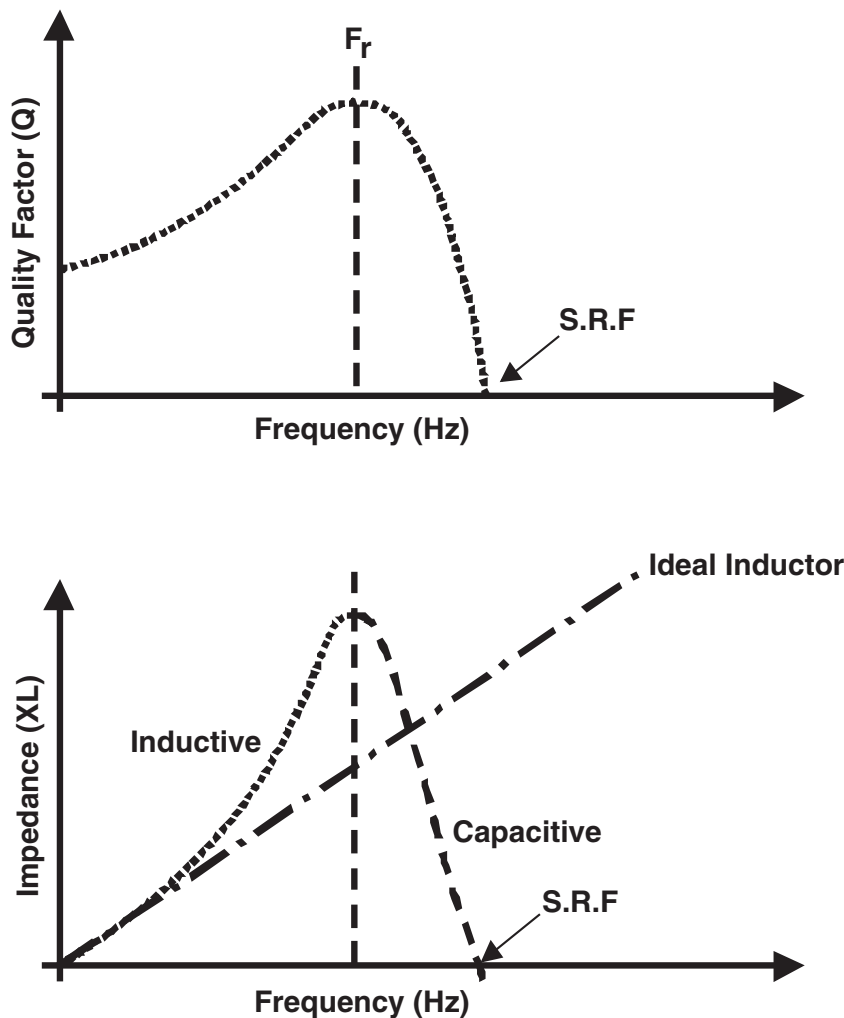


Fig. 2.0 Impedance and Inductance Characteristic of a Real World Inductor

WIRE-WOUND RF CHIP INDUCTORS

Application Notes



Q factor / SRF

The ratio of an inductor's reactance (XL) to its series resistance (Rs) is often used as a measure of the quality factor of the inductor. The larger the ratio, the better the inductor. The quality factor of an inductor is often referred to as the Q of the inductor. If the inductor were constructed from a perfect conductor (zero loss), its Q would be infinite. Of course this is impossible, and so the Q of an inductor will always have some finite value.

The Q factor, Fr and SRF of an inductor are directly linked to one another. If the test frequency is near Fr or SRF, the inductor results may be misleading by very wide margins, since the result is dominated by distributed capacitance reactance. To overcome this problem, the test frequency of the inductor is normally located at a point on the inductor's curve where the reactance of the inductor approaches that of an ideal inductor, so that component to component variations are kept to a minimum since the parasitic contribution is also at a minimum. To overcome this problem, RF engineers should select an inductor with the highest test frequency possible to guarantee the quality of the inductor.

At low frequencies, the Q of an inductor is very good because the only resistance in the winding is the dc resistance of the wire which is very small (Fig. 2.0). As mentioned earlier, as the frequency increases, the skin effect increases to degrade the Q of the inductor. At low frequencies, the Q increases directly in line with the reactance (XL) since the skin effect has not become noticeable. The Q continues to rise, but as the frequency approaches Fr, the skin effect starts to become a dominant, reducing the rate of increase. At Fr, the series resistance and reactance are increasing at the same rate. Above Fr, the distributed capacitance Cd and skin effect of the winding combine together to decrease the Q of the inductor to zero at SRF.

Understanding Inductor Curves

RF design engineers require inductors to meet the following requirements:

1. Low cost
2. Compatibility to the competition
Q, SRF and useable frequency range => competition
3. Component to component variation small
4. Performance approaches that of an ideal inductor
High Q (low series resistance)
High SRF (low distributed capacitance)

	Ideal Inductor		Real World Inductor	
Distributed Capacitance	Cd = 0	Infinite SRF	Cd = Min	High SRF High Fr
Series resistor	Rs = 0	Infinite Q	Rs = Min	High Q High Fr

3.0 Characteristics of a Real World Inductor Vs Ideal Inductor

Determining the Inductor Equivalent Circuit

To determine the inductor equivalent circuit, an RF engineer must deduce the value of Rs and Cd from the curves supplied by the inductor manufacturer. To do this, the following equations can be used. Of course, the values deduced only apply at one specific frequency. The recommended frequency at which the inductor is used within the application should be an order of magnitude ($\div 10$) below the SRF, and preferably not near than $\frac{1}{2}$ Fr.

Equation 1: $F_c < \frac{SRF}{10}$ and/or $< \frac{FR}{2}$

Equation 2: $R_s = \frac{X_L}{Q} = \frac{2 * \pi * F_c * L}{Q}$

Equation 3: $C_d = \frac{1}{(2 * \pi * SRF)^2 * L}$

Where:

- Fc = Centre frequency of application / intended operation
- SRF = Series resonant or self resonant frequency of the inductor
- π = 3.14159
- L = Inductor value

WIRE-WOUND RF CHIP INDUCTORS

Sales Offices



NORTH AMERICA

Corporate Headquarters

Pulse
12220 World Trade Drive
San Diego, CA 92128
TEL: 858 674 8100
FAX: 858 674 8262

Pennsylvania

Pulse Specialty Components (PSC)
Two Pearl Buck Crt.
Bristol, PA 19007
US
TEL: 215 781 6400
FAX: 215 781 6403

EUROPE

United Kingdom (Northern European Sales)

Pulse
Areas: UK, Ireland, Norway,
Finland, Denmark, Sweden,
S. Africa. Netherlands, Israel
3 Huxley Rd
Surrey Research Park,
Guildford, Surrey GU2 7RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

France (Southern European Sales)

Pulse SA
Areas: Belgium, France, Spain,
Portugal, Greece, Turkey, Italy
Zone Industrielle
F-39270 Orgelet,
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

Germany (Central European Sales)

Pulse GmbH
Areas: Germany, Austria,
Switzerland & Eastern Europe
Raiffensenstrasse 2
D-63110 Rodgau,
Germany
TEL: 49 6106 82980
FAX: 49 6106 829898

ASIA

Singapore (Southern Asia)

Pulse
150 Kampong Ampat
#07-01/02
KA Centre,
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

Taiwan (Northern Asia)

Pulse
3F-4, No. 81, Sec. 1
Hsin Tai Wu Road
Hsi-Chih
Taipei Hsien,
Taiwan, R.O.C.
TEL: 886 2 26980228
FAX: 886 2 26980948

Hong Kong

Pulse
19/F, China United Plaza
1008 Tai Nan West Street
Cheung Sha Wan
Kowloon
Hong Kong,
China
TEL: 852 2788 6588
FAX: 852 2776 1055